

2-14-00

A

ARNOLD
WHITE &
DURKEE

A PROFESSIONAL CORPORATION
ATTORNEYS AT LAW

Austin
Chicago
Houston
Menlo Park
Minneapolis
Washington

750 Bering Drive
Houston, Texas 77057-2198

Telephone 713.787.1400
Facsimile 713.787.1440


Writer's Direct Dial:
713.787.1405


02/11/00



February 11, 2000

FILE: ADDS:017---



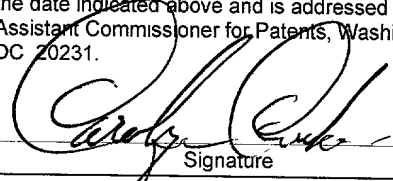CERTIFICATE OF EXPRESS MAILING
NUMBER EL521291863US
DATE OF DEPOSIT 2/11/00
I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, DC 20231.

Signature

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, DC 20231

RE: U.S. Patent Application Entitled: METHOD AND APPARATUS FOR FUEL
ADDITIVE DISPENSING – Robert Stout, Jonathan Guthrie and Chris Duhon

Sir:

Transmitted herewith for filing are:

- (1) 38-page patent specification with 50 claims and an abstract (also Figures 1-7 on 7 sheets);
- (2) Declaration;
- (3) Assignment and Assignment Cover Sheet and check for \$40;
- (4) Power of Attorney;
- (5) Our check in the amount of \$745.00 (the total filing fee listed below).

ARNOLD WHITE & DURKEE

Assistant Commissioner for Patents

February 11, 2000

Page 2

FILING FEE CALCULATION

FOR		Small Entity	Large Entity
Total Claims	50 - 20 = 30	x \$9 = \$ 270.00	or x \$18 = \$
Independent Claims	2 - 3 = 0	x \$39 = \$ 0.00	or x \$78 = \$
Multiple Dependent Claim(s)		+ \$130 = \$ 130.00	or + \$260 = \$
Basic Fee:		+ \$345 = \$ 345.00	or + \$690 = \$
Assignment Recording Fee:	(\$40 per assignee)	+ = \$	+ = \$
TOTAL FILING FEES		\$ <u>745.00</u>	\$ <u>0.00</u>


Pursuant to 37 C.F.R. § 1.10 the Applicants request the Patent and Trademark Office to accept this application and accord a serial number and filing date as of the date this application is deposited with the U.S. Postal Service for Express Mail.

If the check is inadvertently omitted, or the amount is insufficient, or should any additional fees under 37 C.F.R. §§ 1.16 to 1.21 be required for any reason in connection with this application, or should an overpayment be included herein, the Assistant Commissioner is authorized to deduct or credit said fees from or to Arnold White & Durkee Deposit Account No. 01-2508/ADDS:017/KRE.

Please date stamp and return the enclosed postcard to evidence receipt of these materials.

Please forward any reply to this communication directly to our Houston office for docketing purposes. The mailing address and the physical address for courier packages is 750 Bering Drive, Houston, Texas, 77057-2198, and the Houston fax number is 713.787.1440.

Respectfully submitted,



Hugh R. Kress

Reg. No. 36,574

HRK:cg

Encl:


APPLICATION FOR UNITED STATES LETTERS PATENT

for

**METHOD AND APPARATUS FOR FUEL
ADDITIVE DISPENSING**

by

**ROBERT STOUT
JONATHAN GUTHRIE
CHRIS DUHON**

"EXPRESS MAIL" MAILING LABEL	
Number EL521291863US	Date of Deposit
Pursuant to 37 C.F.R. § 1.10, I hereby certify that I am personally depositing this paper or fee with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above in a sealed envelope (a) having the above numbered Express Mail label and sufficient postage affixed, and (b) addressed to the Assistant Commissioner of Patents and Trademarks, Washington, D.C. 20231	
Date <u>02/11/00</u>	Signature <u></u>
Printed Name <u>CAROLYN GERKEN</u>	

RELATED APPLICATION

Pursuant to 37 C.F.R. § 1.78, this application claims the priority of provisional application Serial Number 60/123,627 filed on March 10, 1999, the content of which being hereby incorporated by reference herein in its entirety.

FIELD OF THE INVENTION

The present invention relates generally to the dispensing of fuel additives, and more particularly to a system for adding fuel additives into a fuel refueling stream at a fuel dispenser.

BACKGROUND OF THE INVENTION

The present invention relates to the addition of fuel additives into the fuel refueling stream at a fuel dispenser, simultaneous with a customer refueling his/her automobile in an otherwise normal manner.

Fuel additives are well known in the art. Such additives are typically petroleum-based or synthetic chemical products that can be formulated to address specific driving or automotive performance issues when added to gasoline or diesel fuels. Examples of the benefits of such additives include helping to clean fuel system components, enhancing overall engine performance, improving fuel economy, reducing emissions and preventing freezing of fuel lines in cold weather conditions.

Fuel additives are commonly blended into fuels at bulk loading terminals, for eventual retail sale through fuel dispensers as so-called "blended products." Treat rates (i.e., the concentration levels) for such additives are low, as additization levels are primarily intended to enable the fuel to meet minimum EPA regulatory requirements. In response to the known benefits of fuel additives added to fuels in more concentrated levels, a market has developed over time for bottled after-market additives. Such additives can enable treat rates many times that of pre-blended additives, and, as a result, greatly enhance cleaning, performance and other benefits to consumers.

The purchase and use of bottled after-market additives can be an inconvenient, messy, and cumbersome process. Bottled additives must be purchased from a retail store and manually poured into the vehicle fuel tank prior to refueling. This process is often smelly and messy, as liquid can spill on the car or a consumer's clothing as the additives are being poured into the vehicle fuel tank. Customers must also decide the quantity of the bottle of additive required, based on the amount of fuel to be dispensed and recommended additive treat rates.

1 Until they are properly discarded, partially-used additive containers are often left to roll around
2 in the back seat or trunk of a vehicle, and can leak if bottles or cans are not properly secured.
3 These aspects of the purchase and use of such additives are believed to have limited the
4 market for such products.

5 Various methods to facilitate the blending of fuel additives into fuels at fuel dispensers
6 have been addressed in prior art. For example, U.S. Patent No. 4,131,215 to Hansel and U.S.
7 Patent No. 5,163,586 to Zinsmeyer propose fuel dispensers with additive dispensing
8 capabilities in which a fuel additive may be dispensed along with fuel, and the cost of the fuel
9 plus additive combined to result in one blended price to the consumer. These technologies
10 appear to be applicable only to newly manufactured fuel dispensers. In addition, such
11 technologies would seem to require extensive redevelopment and upgrading of existing station
12 fuel dispensers and point-of-sale systems to support the functionality required for fuel additive
13 injection at fuel dispensers. As such, the aforementioned patents do not seem to address the
14 need for technology for upgrading (i.e., retrofitting) existing fuel dispensers in the field.

15 U.S. Patent No. 5,018,645 to Zinsmeyer proposes a fuel additive dispensing system
16 separate from the fuel dispenser, in which additives are be blended into dispensed fuel, with the
17 cost and amount of additive being displayed separately from that of the fuel. This technology
18 involves a method for separating the fuel additive dispensing unit from the fuel dispenser.
19 However, there remains a need in the art for technology that can be physically attached to any
20 make or model of fuel dispenser, which can support full integration with existing station point-of-
21 sale systems without the need for redevelopment or extensive upgrading of such point-of-sale
22 systems, and which can support the multiple modes of customer selection, operation, and
23 payment that is desirable for operating fuel additive dispensing systems.

24 Various technologies have also been shown in prior art for metering and blending of
25 additives into fuels. For example, U.S. Patent No. 4,253,436 to Dudrey proposes a system that
26 includes a control unit for delivering a predetermined quantity ratio of additive to the amount of
27 fuel pumped into a particular tank. U.S. Patent No. 4,621,593 to Rao et al. proposes an
28 apparatus for dispensing an additive into a fuel tank in dependence upon the level of fuel within
29 a fuel tank. U.S. Patent No. 5,251,785 to Hayden proposes a method of using electromagnetic
30 energy transmitted through a window to blend additive into a flow stream at a controlled rate.
31 U.S. Patent No. 5,331,994 to Bryan proposes a system in which a minimum of three fuel level
32 readings taken at fixed periods can be used to control the operation of an additive dispensing
33 pump and maintain additive at a predetermined additive concentration with respect to the fuel.

1 U.S. Pat No. 5,441,072 to Indey, et al. proposes a method of dispensing additive at a variable
2 rate corresponding to monitored variations in fuel flow rate. Finally, various technologies have
3 been proposed for controlling the addition of an additive to the fuel while an engine is running
4 through use of on-board additive tanks; U.S. Patent No. 4,727,827 to Hoffman et al. and U.S.
5 Patent No. 5,195,466 to Schulte et al. are two examples of this.

6 In general, while each of these prior technologies addresses methods and processes
7 that may support the injection of fuel additives at fuel dispensers, testing and evaluation of
8 various metering methods indicates that there remains a need in the art for the development of
9 metering technology suitable for the injection of fuel additives at fuel dispensers.

SUMMARY OF THE INVENTION

In view of the foregoing and other considerations, the present invention relates to a fuel additive dispensing system for a vehicle refueling station that enables customers at fuel dispensers to conveniently purchase and automatically blend supplemental fuel additives with their fuel during an otherwise normal refueling process. Further, the present invention enables a customer to pay for the additives in the same form and manner as that of their fuel and/or other purchase items.

The disclosed invention includes several key components, including one or more additive storage tanks and flow lines, one or more fuel additive dispensing units that attach to existing (or new) fuel dispensers and provide fuel additive service to one or both sides of said fuel dispensers, electronic control and microprocessor components incorporated into each fuel additive dispensing unit that monitor customer actions and adjacent fuel dispenser conditions including grade of fuel selected and fuel flow volumes, hydraulic metering and injection equipment incorporated into each fuel additive dispensing unit that enable the injection of precise volume increments of fuel additives corresponding to successive, selectable volume increments of fuel, audiovisual display screens incorporated into each fuel additive dispensing unit that provide product and transactional information to customers through state-specific audiovisual sequences, and network computer control equipment that provides centralized control for fuel additive dispensing unit operational and transactional processes and enables fuel additive transactions to be integrated with corresponding fuel transactions for customer payment in the same form and manner as that of the fuel and/or other purchases.

For a field system installation, fuel additive dispensing units are attached to one or more fuel dispensers at a fueling station site. One dispensing unit can provide service to one or both sides (i.e. both fueling position locations) of a single fuel dispenser, and enable the choice of one or more types of additive products to customers. In accordance with one embodiment of the invention, a dispensing unit may be physically connected to the fuel dispenser through multiple physical, hydraulic, and electronic interconnections, through the use of various housings, flanges, and electronic cables that may vary based on the fuel dispenser make and model. Each dispensing unit at a site is also connected to two additional systems: one or more additive storage and pressuring systems that provide supplies of fuel additives to each dispensing unit, and a central network server that directs operational and transactional activities of all dispensing units located at a site. In accordance with another aspect of the invention, access to storage and pressuring means may variously be either internal or external to each

1 dispensing unit, and the central network server may be either a stand-alone system or
2 integrated within the body of the existing station point-of-sale system. The system design and
3 manner of physical integration at a site enables existing fueling stations to be upgraded to
4 include fuel additive dispensing capabilities without the need for extensive redevelopment,
5 remanufacture, and reinstallation of the existing fuel dispensers or point-of-sale systems.

6 The primary interface between the invention and customers at fuel dispensers is through
7 a graphic display integrated into the fuel additive dispensing unit. Such display is preferably
8 located within the customer's normal field of vision with respect to the fuel dispenser, and can
9 be canted toward the customer at an angle, to facilitate visibility and use. The display and
10 accompanying electronic and computer control systems enable the dispensing unit to monitor
11 operating and transactional information on the invention and the adjacent fuel dispensing
12 equipment on a real-time basis, including grade of fuel selected and fuel flow volume. Further,
13 the display and electronic systems are preferably capable of simultaneously displaying multiple
14 types of text, graphics, and transactional information in different areas of the display screen.

15 A display system associated with the dispensing in accordance with the present
16 invention can preferably display running totals for the purchase of fuel additives by itself or
17 simultaneous with the display of other information, and provide interactive, state-specific,
18 graphical and/or textual display information to customers, such that each of any number of
19 additive dispensing systems at a site can display separate display content for each customer,
20 thereby responding to specific modes of customer activity or equipment conditions at either the
21 additive dispenser or the adjacent fuel dispenser. Preferably, the display and associated
22 electronic system can send and receive transactional information required to support customer
23 payment in the same form and manner as for the fuel or other purchases. In one embodiment,
24 the video display may include an audio speaker to support the presentation to customers, and a
25 proximity detector that can sense the presence of a customer or automobile so that video
26 and/or audio content can be initiated or changed as a customer approaches the fuel dispenser.

27 Each fuel additive dispensing unit located at a site can interconnect either at the fuel
28 dispenser with electronic circuitry that enables additive transactions to be integrated with the
29 fuel transactions through the existing retail point-of-sale system, or via network computer
30 communication (traditional cable or RF, for example) to a separate, stand-alone computer
31 network server which functions as a central network control hub separate from the station retail
32 point-of-sale system. Interactions between a central network server and each dispensing unit
33 support the various transaction authorization, control, processing, data storage, and video

1 display functions that are necessary for invention operation. In addition, the central network
2 server also interfaces with the existing retail station point-of-sale system to enable fuel additive
3 transactions to be matched with the corresponding fuel transactions and facilitate payment of
4 the additives in the same form and manner as for the fuel or other purchases.

5 In accordance with one aspect of the invention, consumer use of the system is quick,
6 easy, and convenient. Consumers view product related information on the display screen
7 included in the dispensing unit before and during the normal refueling process. This feature
8 provides an optimum means of educating and informing a customer regarding the features and
9 benefits of the additive products offered, as well as how to make and pay for a selection. If a
10 customer does not wish to purchase an additive, the refueling transaction proceeds as normal.
11 If, however, a customer does desire an additive, the system enables the customer to select
12 among one or more types of additives, and, notably, to make a selection at any point during the
13 refueling process. The customer merely presses a button located on the dispensing unit
14 (typically on or near the display screen) to make a product selection. The invention also
15 supports the ability of consumers to make an additive selection inside the fueling station or at a
16 kiosk if it is desired to prepay for fuel and additive prior to the fuel transaction. Finally, in
17 alternate embodiments product information and product selections may be made on the fuel
18 dispenser, through electronic communications with the dispensing unit and the central network
19 server.

20 Once a selection is made, computer-controlled electronic and hydraulic systems monitor
21 fuel dispenser activity on a real-time basis, such that precise volume increments of the selected
22 additive may be injected directly into the fuel refueling stream, commensurate with successive
23 volume increments of fuel dispensed. Additive increments can be varied through configurable
24 software logic adjustments, made either at compile time or through the provision of software
25 options. In addition, dispensing can proceed in one of three modes of injection: In one
26 embodiment, all dispensed fuel is treated with additive without regard to when an additive
27 selection is made. Alternatively, only fuel dispensed subsequent to when an additive selection is
28 made may be treated with additive. As another alternative, a preset volume of additive may be
29 injected regardless of the volume of fuel dispensed. Following a transaction, each dispensing
30 unit transfers additive sales data through the central network server to the station point-of-sale
31 system so as to enable customers to pay for the additive purchased in the same form and
32 manner as that of their fuel or other purchases: either at the fuel dispenser (via payment system
33 integrated into the dispenser) or inside the store or at the kiosk. In the case of prepaid

1 transactions, such transfer of post-transaction additive sale data may be preceded by the
2 transfer of additive authorization data prior to the sale.

3 The present invention advantageously enables fuel retailers and/or automotive
4 consumers to select and add fuel additives into the fuel refueling stream at the fuel dispenser
5 while an automobile is being refueled in the normal manner. Further, the present invention
6 advantageously enables the cost of such additives to be integrated with the corresponding fuel
7 transactions so as to enable customers to pay for the additive purchased in the same form and
8 manner as that of their fuel or other purchases. Moreover, in accordance with a further aspect
9 of the invention, existing stations may be upgraded (i.e., retrofitted) to include additive
10 dispensing capabilities in accordance with the principles of the present invention without the
11 need for extensive reengineering, remanufacture, and reinstallation of the existing fuel
12 dispensers or point-of-sale systems.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other features and aspects of the subject invention will be best understood with reference to a detailed description of a specific embodiment of the invention, which follows, when read in conjunction with the accompanying drawings, in which:

Figure 1 is an exploded view of a conventional fuel dispenser and a fuel additive dispensing unit in accordance with one embodiment of the invention;

Figure 2 is a partially cut-away view of the fuel additive dispensing unit from Figure 1;

Figure 3 is a partially cut-away view of a fuel additive dispensing unit in accordance with an alternative embodiment of the invention;

Figure 4 is an illustration of a display and control module from the fuel dispensing unit of either the embodiment of Figure 1 or the embodiment of Figure 2;

Figure 5 is a state diagram representing operational states and events occurring in a fuel and fuel additive dispensing system in accordance with one embodiment of the invention;

Figure 6 is a state diagram representing operational states and events occurring in a fuel and fuel additive dispensing system in accordance with an alternative embodiment of the invention; and

Figure 7 is a block diagram of a fueling station showing the general manner in which each invention unit can be connected to a central network computer server, and a schematic of the primary communication linkages between a typical fuel dispenser, the invention, the central network server, and the station point-of-sale system.

DETAILED DESCRIPTION OF SPECIFIC EMBODIMENTS OF THE INVENTION

The present invention makes use of and integrates two principal technologies: fuel dispensing systems and computer-based electronic control systems. In the disclosure that follows, in the interest of clarity, not all features of actual implementations are described. It will of course be appreciated that in the development of any such actual implementation, as in any such project, numerous engineering and programming decisions must be made to achieve the developers' specific goals and subgoals (e.g., compliance with system- and business-related constraints), which will vary from one implementation to another. Moreover, attention will necessarily be paid to proper engineering and programming practices for the environment in question. It will be appreciated that such a development effort might be complex and time-consuming, but would nevertheless be a routine undertaking for those of ordinary skill in the fields of computer and control system design and fuel dispensing technology having the benefit of this disclosure.

Referring to Figure 1, there is shown a fuel dispensing system 100 incorporating a fuel additive dispensing unit 102 in accordance with one embodiment of the invention. It is to be understood that Figure 1 is a partially exploded view, in that it shows the general manner in which the disclosed embodiment of a fuel additive dispensing unit 102 is attached to the side of a fuel dispenser 104 (sometimes referred to in common parlance as a "gas pump") by removing existing fuel dispenser side panel 106 and bolting or otherwise affixing dispensing unit 102 onto the side of fuel dispenser 104 at the prior location of the dispenser side panel 106. The installation process is reflected by arrows 108 in Figure 1 indicating how additive dispensing unit 102 is directed toward fuel dispenser 104 during an installation procedure. In the disclosed embodiment, the rigid (e.g. steel) external housing of dispensing unit 102 is sized and shaped so as to complement the configuration of the side of fuel dispenser 104, making the mating of dispensing unit 102 with fuel dispenser natural and aesthetically inconspicuous. Further, fuel dispenser side panel 106 may be reattached to the exterior side of dispensing unit 102, so as to preserve existing color schemes, brand name logos, and the like.

In the presently preferred embodiment of the invention, fuel dispensing unit 102 is adapted to be attached to the side of fuel dispenser 104, although it is to be understood that other configurations may be adopted, and that in alternative embodiments, dispensing unit 102 may be configured to be attachable at locations on dispenser 104 other than the side thereof. In one embodiment, dispensing unit 102 comprises a rigid (e.g., steel) housing.

Several additional connections are made between dispensing unit 102 and fuel

1 dispenser 104 to complete the physical installation. First, electronic cable(s) (not shown in
2 Figure 1) from dispensing unit 102 are connected to cables emanating from each of the fuel
3 flow meters and nozzle lift indicators inside fuel dispenser 104. Such connections enable
4 electronic and computer circuitry inside dispensing unit 102 to monitor fuel flow rates on a real-
5 time basis through monitoring of pulses or other outputs of the fuel flow meters, as displayed on
6 fuel dispenser 104 on a display designated with reference numeral 141 in Figure 1. In addition,
7 such connections also enable the electronic and computer circuitry of dispensing unit 102 to
8 monitor the grade of fuel selected by the customer and the initiation and termination of fueling
9 transactions on a real-time basis, as such events are conducted by a customer at a nozzle
10 location 112 or other location.

11 Regarding display 140, it is contemplated that numerous known display technologies,
12 including without limitation, liquid crystal display (LCD) screens, video display screens, and the
13 like, will be suitable for the purposes of practicing the present invention. It is believed that those
14 of ordinary skill in the art having the benefit of the present disclosure will be readily able to
15 implement a suitable display 140 for the purposes of the invention as described herein.

16 In the disclosed embodiment, such electronic cable(s) use multiple pin connectors in
17 which the electronic cable(s) from dispensing unit 102 tie in to cable(s) inside fuel dispenser
18 104 emanating from each of the fuel flow meters and nozzle lift indicators. Such cables(s) are
19 of various types, as necessary to fit each of various makes and models of fuel dispensers 104.
20 All such cable(s) are integrated into fuel dispenser 104 in a manner so as not to interfere or
21 alter normal fuel dispenser operation. In an alternate embodiment, such interconnections of
22 dispensing unit 102 with the fuel flow meters and nozzle lift indicators inside fuel dispenser 104
23 are accomplished via linkage to an interface box or other system that separately monitors and
24 enables access to data and information regarding fuel dispenser activities and operating
25 conditions.

26 Second, electronic cables from dispensing unit 102 connect to an electrical junction box
27 (not shown in Figure 1) inside fuel dispenser 104 in a manner to enable dispensing unit 102 to
28 receive electrical power from fuel dispenser 104.

29 Finally, fuel additive product flow lines emanating from dispensing unit 102 connect to
30 each of the fuel flow lines inside the dispenser 104 at a convenient point such as that
31 designated generally with reference numeral 114 in Figure 1, downstream of each fuel flow
32 meter. In this way, fuel additives can be injected into the fuel refueling stream at fuel dispenser
33 104 downstream of each fuel flow meter. At such point of interconnection 114, check valves

1 and/or other flow control means are used to prevent reverse flow of fuel or additive through fuel
2 dispenser 104 or the fuel additive flow lines inside dispensing unit 102. With regard to the check
3 valves, in the presently preferred embodiment, a model 2232T1-2MM check valve commercially
4 available from Circle Seal Controls, Inc., Corona, California is believed to have the desired
5 combination of internal components, pressure rating, and durability for the purposes of the
6 present invention.

7 Those of ordinary skill in the art will appreciate that the means of such interconnection
8 114 may be via custom-designed flanges, injection ports, or other suitable means, depending
9 on requirements for each various make and model fuel dispenser 104. It is believed that the
10 exact nature of the interconnection is not critical for the purposes of the present disclosure,
11 beyond what has been stated above.

12 In various alternate embodiments, connections of fuel additive flow lines from dispensing
13 unit 102 to fuel flow lines inside fuel dispenser 104 may be made at a point upstream of the fuel
14 flow meters. In addition, dispensing unit 102 may alternatively be configured and attached to
15 fuel dispenser 104 in a variety of manners and at various locations. It is believed that those of
16 ordinary skill in the art having the benefit of the present disclosure will recognize and appreciate
17 these and many other such design options and alternatives which may differ from
18 implementation to implementation.

19 Turning now to Figure 2, there is shown a partially cut-away view of dispensing unit 102
20 in accordance with the presently disclosed embodiment of the invention. In the embodiment of
21 Figure 2, a fuel additive storage and pressuring unit 116 is located exterior to the body of
22 dispensing unit 102. In this embodiment, a customer at fuel dispenser 104 would view display
23 content on a display and control module 110 associated with dispensing unit 102, and make a
24 selection at any point during the fueling transaction, for example by pressing a selection button
25 such as button 117 in Figure 2 adjacent to or on display and control module 110. After a
26 selection is made by the customer, electronic and computer circuitry integrated into the display
27 and control module 110 of the invention senses such selection.

28 In the presently disclosed embodiment, display and control module 110 comprises
29 electronic circuitry for controlling the display content of display 140, and further comprises
30 circuitry and user interface means (e.g., buttons, touch-sensitive displays, and the like) for
31 enabling a customer to select one or more options associated with the dispensation of fuel
32 additives. It is believed that those of ordinary skill in the art having the benefit of the present
33 disclosure would be readily able to implement the electronics associated with display and

1 control module 110 to achieve the functionality described herein; accordingly, the specific
2 implementation details for display and control module 110 are described herein primarily in
3 functional terms.

4 As will be hereinafter described in further detail, in accordance with one aspect of the
5 invention display and control module 110 may be responsive to user interaction either before or
6 during a fueling operation to initiate the dispensation of fuel additive into the stream of fuel
7 dispensed from dispenser 104. This is believed to be a particularly advantageous aspect of the
8 invention, since it enables to customer to initiate the dispensation of fuel additive even after a
9 fueling process has begun.

10 A hydraulic module for controlling the flow of additive that is dispensed is designated
11 generally with reference numeral 118 in Figure 2. After an additive selection is made by a
12 customer, or indicated based on other criteria, fuel dispenser conditions are monitored through
13 electronic cables designated with reference numeral 120, and electronic signals are sent
14 through electronic cables 122 to direct the operation of input manifold(s) 123 and output
15 manifold(s) 124 that are disposed within hydraulic module 118. Such operation causes the
16 selected fuel additive product to flow from the additive storage means 116 by way of the
17 pressure generated by a pump 126 into dispensing unit 102 through additive flow lines 128,
18 safety breaks 130, and filtration means 132, into and through an additive flow meter 134
19 integrated into hydraulic module 118, and then into the appropriate additive flow line 136. This
20 in turn causes the selected fuel additive to be injected into the appropriate fuel flow line inside
21 fuel dispenser 104. In one embodiment, pump 126 may be selectively turned on and off by
22 electronic signals generated by display and control module 110.

23 Hydraulic module 118 in the presently disclosed embodiment provides fuel additive
24 service to one or both sides of fuel dispenser 104 (i.e. both fueling positions), and in one
25 embodiment is comprised of one or more sets of inlet flow control manifolds 123 and outlet flow
26 control manifolds 124, upstream and downstream, respectively of a positive displacement flow
27 meter 134. Each inlet manifold 123 incorporates one solenoid valve for each additive product.
28 Each outlet manifold 124 incorporates one solenoid valve for each gasoline hose 113 plus one
29 solenoid valve that allows flow to be redirected through a calibration testing line 125 for the
30 purposes of volume accuracy testing. (As used herein, the term gasoline hose 113 will be used
31 to refer to the familiar, typically flexible rubber hose having a nozzle at its distal end for manual
32 insertion into the fuel tank of a customer's automobile. On the other hand, it is intended that the
33 term "hose" as used herein shall be interpreted broadly to encompass any means by which

1 gasoline is dispensed from dispenser 104 into an automobile's gas tank, including all presently
2 known such means and any means to be developed in the future.)

3 The terminus end of calibration testing line 125 includes a check valve (not shown) and
4 a valve (also not shown) for control of flow testing and subsequent sealing by weights and
5 measures officials. In the presently preferred embodiment, the check valve on calibration
6 testing line 125 is a model SS-CHM4-10 valve commercially available from Swagelok Inc. The
7 SS-CHM4-10 has been found to maintain a positive seal after closure, advantageously leaving
8 consistent volumes of additive in the calibration line. This is believed to be desirable for
9 maintaining consistent volume accuracy readings for weights and measures testing.

10 In operating mode, an upstream solenoid valve on an inlet manifold 123 is actuated
11 corresponding to an additive selected by a customer, and a downstream solenoid valve on an
12 outlet manifold 124 is actuated corresponding to the grade of fuel selected by the customer.

13 In calibration mode, an upstream solenoid valve on an inlet manifold 123 corresponding
14 to an additive selected by an operator or testing official is actuated. A downstream solenoid
15 valve on an outlet manifold 124 is actuated such that additive flow is redirected through
16 calibration testing line 125.

17 Those of ordinary skill in the art will appreciate that in alternate embodiments, various
18 combinations of manifolds, solenoid valves, flow meters, or calibration lines could be used to
19 provide service to one or both sides of the fuel dispenser. Additionally, although the present
20 disclosure speaks in terms of one or more discrete hydraulic "modules" 118, this is done solely
21 for the purposes of ease of collective reference. It is to be understood that the various hydraulic
22 elements (manifolds, solenoids, flow control meters and the like) comprising hydraulic modules
23 118 may not be implemented in the form of discrete units physically segregated from other
24 components of the overall system, but instead may be physically distributed and located in
25 different positions with respect to dispensing unit 102 and dispenser 104, as implementation
26 requirements dictate. It is intended that the term "hydraulic module" as used herein shall
27 encompass any arrangement of the various hydraulic control elements necessary for
28 performing the flow control functions described herein.

29 In the presently disclosed embodiment, manifolds 123 and 124 are conventional off-the-
30 shelf components such as the No. 82626G208 solenoid valve commercially available from
31 Automatic Switch Company (ASCO), Florham Park, NJ (<http://www.ascovalve.com>). ASCO
32 uses the designations HP 274387, HP 274388, and HP 274401 to refer to configurations of
33 8262G208 valves and manifolds presently preferred for the purposes of practicing the present

1 invention.

2 Flow meter 134 may be the Series 210 Positive Displacement Flow Meter commercially
3 available from Max Machinery, Inc., Healdsburg, CA (<http://www.maxmachinery.com>).
4 Specifically, the presently preferred flow meter for the purposes of practicing the present
5 invention is the Max Machinery model 214-410-000 flow meter with V884 material, in
6 association with a Max Machinery model 284-522-000 sensor and electronics assembly for
7 monitoring flow meter activity and emitting electronic pulses commensurate with metered
8 volumes.

9 Those of ordinary skill in the art having the benefit of the present disclosure will
10 appreciate, however, that various forms and combinations of components such as described
11 herein can be employed in additional embodiments, such as different configurations for additive
12 storage and pressuring means, different numbers of additive flow lines and corresponding
13 downstream or upstream components corresponding to multiple options of additive products
14 offered to customers, different manifold and flow meter configurations, and the use of various
15 numbers, types, and combinations of pumps and flow meters inside or outside dispensing unit
16 102 to transport and accurately measure fluid volumes within the appropriate tolerances.

17 In operation, electronic and computer control circuitry and injection control software
18 inside display and control module 110 enable the monitoring of customer activity and operating
19 conditions at the fuel dispenser on a real-time basis through electronic cables 120, such that
20 the information such as the gasoline grade selected, the initiation and termination of fuel flow,
21 and actual fuel flow volume may monitored. For example, in one embodiment, fuel flow is
22 monitored through the counting of electrical pulses recorded by the fuel flow meter, the number
23 of pulses being proportional to fuel volume.

24 As noted above, it is believed that the specific implementation of the electronic circuitry
25 needed to implement the functions and functionality described herein, particularly that of display
26 and control module 110 are not critical for the purposes of the present invention, and that the
27 design and implementation of such electronics would be a matter of routine engineering to a
28 person of ordinary skill in the art. Accordingly, specific implementation details about the
29 electronics in the disclosed embodiment shall not be further described herein.

30 As quantities of dispensed fuel are monitored, electronic signals from the electronic and
31 computer control circuitry inside display and control module 110 through electronic cables 122
32 cause the appropriate combination of solenoid valves to sequentially open and close to permit
33 volume increments of the selected additive to be transported through positive displacement flow

1 meters. In the disclosed embodiment, such flow meter outputs a stream of electrical pulses, in
2 which the number of pulses is proportional to fluid volume. Since the timing sequences for the
3 opening and closing of solenoid valves can be affected by operating temperature, fluid
4 pressure, flow rate, valve wear, solenoid type (e.g., AC or DC), and other factors, all of which
5 can impact metered volume, dispensing unit 102 maintains a real-time log of valve timing,
6 cumulative additive volume injected since a predetermined starting point and target cumulative
7 volume injected. This data is processed by computer-controlled algorithms to enable automatic
8 sensing, correction, and ensuing adjustment of subsequent valve timing and injected volumes
9 to optimize metering accuracy. In one embodiment, adjustment of valve timing and injected
10 volumes can be based upon assessment of past performance of the metering system and
11 current hydraulic conditions as detected by the various sensors in the hydraulic module. This is
12 referred to as an "adaptive metering" functionality.

13 In one embodiment, such computer monitoring and control preferably achieves metering
14 accuracy to within approximately 0.75% tolerance levels, despite the relatively low volume of
15 additive being dispensed. That is, in the presently preferred embodiment, hydraulic module 118
16 is preferably capable of ensuring that the amount of additive actually injected into a fuel flow
17 line is within 0.75% of the amount of additive selected and intended to be injected. Those of
18 ordinary skill in the art will appreciate that such accuracy is particularly desirable given the
19 relatively small amounts of additive that are typically dispensed during any given fueling
20 operation. After each additive volume increment is metered, it is subsequently injected into the
21 fuel stream through additive flow lines 136 into the fuel refueling stream at fuel dispenser 104.

22 Additive volume increments are preset quantities that are dispensed so as to
23 correspond to successive predetermined volume increments of fuel dispensed. Through means
24 of configurable injection control software and other electronic and computer control circuitry
25 inside display and control module 110, dispensing unit 102 has the capability to inject additive in
26 varying volume increments at any point during the fueling process, such as at the initiation of
27 fuel dispensing or at any point during any monitored volume increment of fuel dispensed. For
28 example, in one embodiment, dispensing unit 102 injects additive in predetermined volume
29 increments (for example, 0.8 ounces at a time) at, for example, the beginning or the midpoint of
30 each gallon volume increment of fuel dispensed. In alternative embodiments, a predetermined
31 increment of additive may be injected at the beginning of each gallon of fuel dispensed, or at
32 the end of each gallon of fuel dispensed, or at the beginning, end, or any other point during any
33 desired increment of fuel. In still another contemplated embodiment, a single, predetermined

1 amount of additive, as opposed to multiple incremental amounts of additive, is injected; this can
2 be likened to a customer purchasing a bottle of additive, for example, twelve ounces, and
3 manually pouring it into a vehicle's gas tank.

4 Figure 3 is a partially cut-away view of an alternative embodiment of an additive
5 dispensing unit 102' in which the fuel additive storage and pressuring means 116 is included
6 within the body dispensing unit 102', rather than externally as in the embodiment of Figure 2. (It
7 is to be understood that those elements in the embodiment of Figure 3 which are essentially
8 identical to corresponding elements in the embodiment of Figure 2 have the same reference
9 numerals in both of those Figures.) With the embodiment of Figure 3, customers at fuel
10 dispenser 104 view display content on the display screen 140 associated with display and
11 control unit 110, and make selections at any point during the fueling transaction by pressing a
12 selection button 117 adjacent to or on the display and control module 110. After a selection is
13 made by the customer, or indicated by other means (such as a preset additive condition on a
14 prepaid additive sale) the electronic and computer circuitry integrated into the display and
15 control module 110 senses such selection, and monitors fuel dispenser conditions through
16 electronic cables 120 and directs the operation of manifolds 124 and valves in hydraulic module
17 118 through electronic cables 122 such that the selected fuel additive product flows from the
18 additive storage means 116 by way of the pressure generated by pump 126 through additive
19 flow lines 127, and filtration means 130, into and through an additive flow meter 134 integrated
20 into the hydraulic module 118, and then into the appropriate additive flow line 136 which in turn
21 causes the selected fuel additive to be injected into the appropriate fuel flow line inside the fuel
22 dispenser. In one embodiment, pump 126 can be selectively turned on and off by electronic
23 signals generated by control and display module 110 in response to a customer selection of an
24 additive or other event indicating an additive selection made or status of a transaction.
25 Alternatively, pump 126 may be controlled from elsewhere, as will hereinafter be described with
26 reference to Figure 6.

27 The further description of the physical and operating characteristics of the embodiment
28 disclosed in Figure 2 is identical to that of the embodiment disclosed in Figure 3. In addition, as
29 with the potential variability or location of the components in Figure 2, additional embodiments
30 could make use of alternate equipment configurations, including various types and
31 combinations of the pump 126 and filtration means 130 located either under, adjacent to, on, or
32 inside the additive storage means and other various combinations, location, or types of other
33 components as noted for the embodiment disclosed in Figure 2. In addition, the components,

1 mechanism, form and manner of the use and operation of the hydraulic module 118 and the
2 variety of methods of additive injection and all other comments relative to the hydraulic module
3 118 would be similar to such comments made relative to the hydraulic module 118 in
4 connection with the description of the embodiment of Figure 2.

5 In the self-contained embodiment depicted in Figure 3, a suction pressure fill cap is
6 employed to seal fuel additive and pressure means 116. In the presently preferred embodiment,
7 this cap (not depicted in the Figures) is a model 60002 suction pressure fill cap commercially
8 available from Central Illinois Manufacturing Company, Bement, Illinois.

9 Figure 4 depicts display and control module 110 in accordance with one embodiment of
10 the invention. (Those of ordinary skill in the art will appreciate that display and control module
11 110 is essentially the same in the embodiments of Figures 2 and 3, respectively; hence for the
12 purposes of the following disclosure, references to dispensing unit 102 shall be interpreted as
13 applicable to either embodiment, unless otherwise noted.) In the presently disclosed
14 embodiment, display and control module 110 is essentially integral with the housing of
15 dispensing unit 102, although those of ordinary skill in the art will appreciate that display and
16 control module may be affixed to the housing of dispensing unit 102 or fuel dispenser 104 from
17 the housing of dispensing unit 102 or fuel dispenser 104 and connected to the internal
18 components of dispensing unit 102 via multiple cables or wires.

19 As noted above, display and control module 110 preferably houses key electronic and
20 computer components and the display screen for presenting graphical and textual information
21 to customers. Display and control module 110 includes multiple types of electronic and
22 computer circuitry inside a display housing which may integrated into dispensing unit 102.

23 In one embodiment, display and control module 110 includes a display screen 140 that
24 is segregated into different, specific viewing areas. In the example of Figure 4, display screen
25 140 is segregated into three distinct viewing areas designated with reference numerals 142,
26 144, and 146. Each viewing area 142, 144, and 146 is assigned a given function and is under
27 the coordinating control of a specific, independent software code set that works in tandem with
28 the electronic and computer circuitry in the display and control module 110 to enable each
29 screen area to display different types/formats of text or graphical content independent from
30 content that may be displayed on the other areas of the screen 140. In the presently preferred
31 embodiment of the invention, display and control module 110 incorporates a computer platform
32 that is essentially a conventional personal computer class of computer. For example, display
33 and control module 110 may comprise a computer based on the well-known Intel™ Pentium™

1 class of central processing unit or the like, having conventional sub-components such as
2 memory, graphics circuitry and the like associated therewith. Those of ordinary skill in the art
3 will appreciate, of course, that certain functions of dispensing unit 102, including those of
4 display and control module 110, may be performed by dedicated subsystems having their own
5 processing capabilities. Such implementation-specific considerations are not believed to be
6 particularly critical for the purposes of appreciating the present invention. It is believed that
7 those of ordinary skill in the art having the benefit of the present disclosure would be readily
8 able to implement a display and control module suitable for the purposes of practicing the
9 present invention as a matter of routine engineering.

10 In the disclosed embodiment, an upper left portion of the screen 142 is used to display
11 various types of video text, graphics, advertising, promotional and/or infomercial content related
12 to the use and operation of the system, as well as fuel additive product choices, features, and
13 benefits. Such screen area 142 is controlled by an independent software code set and time
14 function in which one or more video and/or audio files stored on RAM within the electronic and
15 computer circuitry of the display and control module 110 are accessed through configurable
16 controls and directed to be displayed on screen area 142 during a specific state for either a
17 specific time duration or until a specific event happens. For example, such specific event may
18 be a customer action that triggers a change to a different state. Through the use of the
19 independent software code set and time function, the display of such video and/or audio files on
20 screen area 142 for any state can be controlled independent of each other and independent of
21 content that may be displayed simultaneously on other screen areas.

22 A bottom portion of the screen 144 is used to display static or running totals of
23 dispensed additive volume, updated on a real-time basis for volume and sale totals for
24 dispensed fuel additive products. Such screen area 144 is controlled by an independent
25 software code and is event-driven on a basis independent of the other screen areas. During an
26 additive dispensing process, dispensed volume data is monitored and/or calculated for each
27 increment of additive dispensed, and the screen area 144 is updated on a real-time basis as
28 such information is received.

29 A right side of the screen 146 is used to display fuel additive product names and prices
30 which correspond to context-sensitive selection buttons 117 located either on or adjacent to the
31 screen 140. Such screen area 146 is controlled by an independent software code set which
32 enables the display to be changed/updated based on one of three specific events. First, at the
33 end of every sale, prices and product names can be read by the electronic and computer

1 circuitry within the display and control module 110 from configuration files in the central network
2 server. The right portion of the screen is changed to reflect any such price or product name
3 change that has occurred. Second, during an additive sale, the prices and/or product names of
4 the "non-selected" additives are blanked-off, or erased from customer's view. This enables the
5 customer to only see information corresponding to the selected product after a selection has
6 been made. Third, the electronic and computer circuitry within the display and control module
7 110 may receive a specific message from the central network server instructing it to reread
8 price or product name information. If so, it rereads and updates such information, unless if
9 such message is received while an additive transaction is in progress, it waits until the sale is
10 completed to read and update such information. Through the use of such independent software
11 code sets within the electronic circuitry of display and control module 110, each area of the
12 screen can display different types/formats of text and graphical content either simultaneous with
13 or independently from that displayed on the other areas of the screen 140, regardless of the
14 content displayed in the other areas.

15 Display and control module 110[®] in the presently disclosed embodiment may further
16 include additional components for facilitating consumer use of dispensing unit. An audio
17 speaker 148 may be integrated into display and control module 110 to support the use of audio
18 in conjunction the graphical content displayed on screen 140. A proximity detector 150 may
19 also be integrated into the display and control module 150. Proximity detector 150 may
20 advantageously be used to detect the presence of an approaching customer or automobile
21 such that audiovisual content can be changed or initiated specifically for each customer, as the
22 customer approaches a dispensing unit 102 or fuel dispenser 104 at the site. Proximity detector
23 150 may be, for example, an infrared motion sensor or the like, such as is commonly employed
24 for the purposes of detecting a person's presence in a particular area. In one embodiment,
25 proximity detector 150 is responsive to the detection of a person in the vicinity of dispensing
26 unit 102 and/or fuel dispenser 104 to generate an electrical detection signal applied to said
27 control circuitry. Upon receipt of such a detection signal, display and control circuitry 110 may,
28 for example, alter the content of display screen 140.

29 Those of ordinary skill in the art will appreciate that in alternate embodiments, the audio
30 speaker 148 and the proximity detector 150 can be moved to locations on dispensing unit 102
31 or fuel dispenser 104 other than those shown in the Figures, as desired in a given
32 implementation.

33 Display and control module 110 may include an area 152 for a decal used to

1 communicate various types of information or promotional content to a customer. Finally; display
2 and control module 110 is positioned on dispensing unit 102 at eye-level and within a
3 customer's normal field of vision at the fuel dispenser 104, such that the module 110 is within a
4 customer's line of sight and easy reach. For example, display and control module 30 in the
5 disclosed embodiment is canted toward the customer at a 28° angle. In alternative
6 embodiments, display and control module 110 can be mounted flush with fuel dispenser 102 or
7 at higher or lower canting angles. Additionally, the display screen 140 and other components of
8 the display and control module 110 can be integrated in a variety of a manners into the fuel
9 dispenser 104 itself, in alternate embodiments.

10 As noted above, display and control module 110 incorporates one or more computers
11 which can (1) by connection to a proximity detector 150 sense when a customer is within range
12 of the device, (2) display various graphical and/or textual content to customers at the fuel
13 dispenser, (3) interactively guide a customer through the selection of a product, (4) display the
14 progress of a sale, (5) control the dispensing of a product, (6) communicate and receive a
15 variety of authorization, sales, and transactional to and/or from a central network server.

16 Figure 5 is a state diagram of the state-specific display and control system logic
17 employed by dispensing unit 102 in one embodiment of the invention. Through this system and
18 associated electronic and computer-controlled systems integrated into dispensing unit 102,
19 dispensing unit 102 monitors customer activity and operating conditions on a real-time basis at
20 both dispensing unit 102 and the adjacent fuel dispenser 104. Such capability enables
21 dispensing unit 102 to (1) change audiovisual content in response to customer activity or
22 operating conditions on a real-time basis such that each customer at each dispensing unit 102
23 or fuel dispenser 104 at a site is presented with individual, position-specific audiovisual content,
24 (2) direct and control the fuel additive injection process on a real-time basis, and (3) facilitate
25 linkages to the various transaction authorization, control, processing, and data storage
26 functions that are necessary for dispensing unit operation and integration of fuel additive
27 transactions with the corresponding fuel transactions such that payment of the additives is
28 accomplished by customers in the same form and manner as that of the fuel or other
29 purchases.

30 The state-specific display system uses a finite state machine, operating on embedded
31 computers preferably within each display and control module 110 connected by a local-area
32 network to one or more computer servers, to simultaneously control audiovisual presentation
33 and additive injection and control operations. The server(s) control the commercial and "back

1 office" aspects of the sale, such as sales authorizations, billing, and interface to the station
2 point-of-sale system, and storage of sales data. The server(s) also maintain sales and other
3 historical data as desired or required by the Bureau of Weights & Measures or other state or
4 federal regulatory agencies. The computer circuitry inside display and control module 110
5 generates the audiovisual display for screen 140 and controls the progress of a sale.
6 Communications between the server(s) and each display and control module 110 within each
7 dispensing unit 102 are facilitated through use of a real-time network protocol that enables
8 constant, real-time interactions between the server(s) and each dispensing unit 102. Each
9 display and control module 110 may be configured to record, maintain and/or transfer event and
10 history logs on a real-time basis for storage on a server. This supports the server(s),
11 maintenance of sales and other historical data as desired or required by Weights and Measures
12 or other state or federal regulatory agencies as well the ability to review past operational events
13 for analysis of code or equipment maintenance issues. The event logging methodology uses a
14 variable, configurable debug level in which the level and volume of detail to be retained in the
15 event log can be specified and/or adjusted as desired. Through use of the real-time network
16 protocol to constantly inform the server(s) of dispensing unit or transaction conditions, the
17 server(s) in tandem with each display and control module 110 use nonvolatile storage of
18 network client data in tandem with battery back up on the network server(s) to enable the
19 orderly transfer, storage and restoration of nonvolatile data. Other computers may be slaved in
20 series or in parallel to accomplish various real-time functions. The use of the finite state
21 machine facilitates interactivity between control operations, network communications, and the
22 audiovisual interface.

23 The finite state machine includes capabilities to enable transactions in a variety of
24 operating modes; payment by cash, credit or debit card either before or after fuel is pumped,
25 with additive volume either preset based upon specification by the customer or automatically
26 set by dispensing unit 102 in response to volume of fuel dispensed. Within each mode of
27 operations, dispensing unit 102 monitors customer activity and equipment conditions at both
28 dispensing unit and the fuel dispenser. Electronic signals are processed and acted upon by
29 various of dispensing unit's electronic and computer circuitry. The state-specific events for one
30 operating mode within the disclosed embodiment would be as follows.

31 With no customer at or in the vicinity of dispensing unit 102 or the fuel dispenser 104,
32 dispensing unit is in the idle state represented by block 156. Dispensing unit 102 remains in this
33 idle state 156 until a customer or automobile approaches. Various types of audiovisual content

1 can be presented during idle state 156, such as a "screen saver" which can be seen by passing
2 motorists. As a customer or automobile approaches dispensing unit 102 and/or fuel dispenser
3 104, proximity detector 150 senses their presence. Electronic signals are processed by the
4 dispensing unit's electronic and computer circuitry and dispensing unit 102 enters into a
5 standby state represented by block 158 in Figure 5. Various state-specific audiovisual content
6 can be presented during standby state 158. In one embodiment, the system can be configured
7 to bypass the idle state 156 altogether, such that a transition from the idle state 156 to standby
8 state 158 is automatically made whenever the state machine attempts to enter idle state 156.

9 Standby state 158 is exited by one of three means. If an additive selection button 117 on
10 dispensing unit 102 is pressed, a select state is initiated, as represented by block 160. More
11 than one select state 160 may be provided, if different pre-pay modes are available, for
12 example. Alternatively, if a fuel hook (designated with reference numeral 162 in Figure 1, for
13 example) is activated by the customer at adjacent fuel dispenser 104, a presale state 164 is
14 initiated. Finally, if no activity or change in equipment conditions at either dispensing unit 102 or
15 adjacent fuel dispenser 104 is detected within a pre-selected time period, dispensing unit
16 returns to the idle state 156.

17 From select state 160, various state-specific audiovisual content is presented. If the
18 customer does not activate a fuel hook at the adjacent dispenser within a specified time period,
19 dispensing unit returns to idle state 156. If the customer does activate a fuel hook 162 at
20 adjacent fuel dispenser 104 within the specified time period, dispensing unit 102 enters a sale
21 state 166. In the sale state 166, dispensing unit can present product-specific audiovisual
22 content as it monitors fuel dispenser activity on a real-time basis, and directs and controls the
23 precise injection of volume increments of fuel additives into the fuel refueling stream at the fuel
24 dispenser through one of three presently contemplated dispensing modes. In a first dispensing
25 mode, all fuel purchased is treated with additive regardless of when the additive selection was
26 made. In a second dispensing mode, only fuel volumes that are dispensed subsequent to when
27 an additive selection was made are treated with additives. In a third dispensing mode, a preset
28 volume of additive is injected into the fuel, without regard to the volume of fuel dispensed.

29 Within each dispensing mode, dispensing unit 102 has the capability to vary the amount
30 of each volume increment of additive or the point of injection corresponding to each volume
31 increment of fuel. In addition, within each dispensing mode, dispensing unit 102 preferably has
32 the capability to calculate whether or not the dispensed additive has traveled through the fuel
33 hose and into the fuel tank. Those of ordinary skill in the art will appreciate that such capability

1 is achieved by monitoring, in dispensing unit 102, the flow of fuel out of fuel dispenser 104, as
2 well as perhaps such parameters as the flow rate. Additionally, control circuitry in display and
3 control module 110 is preferably informed as to the volume of fuel which can be contained in
4 the system between the point of additive injection and the point at which the stream of fuel exits
5 hose 113. With this knowledge, the control circuitry can ensure that each injected increment of
6 additive is expelled from hose 113 before that increment of additive is accounted for (i.e.,
7 charged to the customer). This feature advantageously prevents additive volume increments
8 that have not reached the fuel tank from being billed to the customer. In addition, dispensing
9 unit 102 preferably has the capability to display running total sale information for the product
10 purchased on display screen 140 either by itself or simultaneously with the display of other
11 video content on the screen.

12 Once the deactivation of a fuel hook at fuel dispenser 104 is detected (indicating that the
13 fueling transaction has ended), dispensing unit 102 enters a collect state represented by block
14 168 in Figure 5. Collect state 168 is a transition state in which fuel and/or additive transactional
15 information is relayed to the central additive network server or the station retail point-of-sale
16 system pending closing of the transaction. Once transactions are closed, dispensing unit 102
17 enters a post-sale state represented by block 170 in Figure 5. From this state, sale amounts
18 and other transactional data are transferred to data storage systems, which typically would be
19 located at the central additive network server. Following the post-sale state 45, dispensing unit
20 automatically reenters either the standby state 158 or the idle state 156.

21 From presale state 164 in which a fuel hook 162 at fuel dispenser 104 is activated but
22 no additive button 117 is selected, dispensing unit presents various audiovisual content. If a fuel
23 hook 162 at fuel dispenser 104 is deactivated prior to an additive selection button 117 being
24 pressed by the customer (i.e. transaction ended), dispensing unit 102 enters collect state 168,
25 and proceeds through subsequent states as indicated. If, on the other hand, an additive
26 selection button 117 is pressed while dispensing unit 102 is in the presale state, dispensing unit
27 102 can present to the user various state-specific and/or product specific audiovisual content,
28 after entering the aforementioned sale state 166. Thereupon dispensing unit 102 proceeds
29 through subsequent states as previously described.

30 Dispensing unit 102 supports variable display content in a configurable manner such
31 that any single state on any dispensing unit 102 at a site can incorporate a wide variety of state-
32 specific graphics types and formats, such as still slides without audio or motion video with
33 audio. Such different types and formats can be displayed on different areas of the video display

1 screen simultaneously with different types and formats displayed on other display screen areas,
2 if preferred.

3 The presentation of the state-specific audiovisual content and operating content
4 sequences as described in Figure 5 is for one operating mode only (payment via cash after the
5 fueling transaction is completed). Those of ordinary skill in the art will appreciate that multiple
6 combinations and forms of similar state-specific process may be used for each of multiple
7 modes of operation (e.g. post-pay cash inside, post-pay via credit card at the fuel dispenser,
8 prepay cash or credit inside, and so on), including multiple additional states which may be
9 added before, during, or after the states described with reference to Figure 5.

10 In Figure 6, there is shown a state diagram illustrating the operation of the finite state
11 machine of dispensing unit 102 in accordance with an alternative, and presently preferred,
12 embodiment of the invention. The operation of the state machine illustrated in Figure 6 can
13 perhaps best be appreciated with reference to the following Table 1, which sets forth the
14 operational status of dispensing unit 102 in each of the states. Table 1 further sets forth simple
15 examples of the types of messages or content that might be displayed on display and control
16 unit 110 in each of the states, it being understood that in actual implementation, such messages
17 and content would likely be more "consumer friendly."

TABLE 1

REF. NO.	STATE NAME	DESCRIPTION	EXAMPLE MESSAGE
172	IDLE	This is the equivalent of a "screen saver" on a desktop computer, corresponding to a situation in which dispensing unit 102 has been idle for some period of time and proximity detector 150 does not detect the presence of a customer. Display and control unit 110 may display advertising content, for example.	(Screensaver)
174	STANDBY	The transition from IDLE to STANDBY occurs upon the detection of a potential customer by proximity detector 150. In this state, display and control unit 110 may display content intended to encourage the potential customer to include an additive with his or her purchase.	"Welcome."
176	PRESALE	In this state, display and control unit 110 is aware that the customer is purchasing fuel, but no additive has been selected. Display and control unit 110 may display	"Thank you for your fuel selection; would you like additive as well?"

TABLE 1

REF. NO.	STATE NAME	DESCRIPTION	EXAMPLE MESSAGE
		an inquiry as to whether the customer would like to purchase additive as well.	
178	POSTPAY	The POSTPAY state is entered when the customer has arranged to pay for fuel (and possibly additive) after fuel has been dispensed. An example of this is the familiar "Pay Inside Credit" option found on many conventional fuel dispensers. In the POSTPAY state, display and control unit 110 initiates a transaction by requesting authorization for a specific additive from the computer control circuitry (to be hereinafter described in further detail with reference to Figure 7). The computer control circuitry replies with an authorized dollar amount.	"Transaction authorized."
180	PUMP PAUSE	This state represents a pause in the operation of the state machine while fuel is being dispensed.	"Start fueling; your additive will be dispensed."
182	FUEL SELECT	This state is entered when the customer selects an additive before selecting a fuel type.	"Please select fuel before selecting an additive."
184	ADDITIVE SELECT	If display and control unit 110 is notified of a pre-paid transaction, it notifies the user to either select an additive or select no additive. For prepaid transactions, the computer control system initiates the additive transaction, and display and control unit 110 receives authorization for dispensing additive as soon as the customer begins the fueling transaction. Alternatively, display and control unit 110 can receive an authorization request which requires that an additive be selected before the sale can proceed. A customer can optionally specify "no additive."	"Is an additive desired?"
186	NO SALE	This state is entered if display and control unit 110 is notified of a pre-paid transaction that is expressly not to include additive.	(no message)
188	SALE	This state is entered when dispensing unit 102 begins dispensing additive.	"Additive is being dispensed."
190	COLLECT	This state is entered when the sale of additive is being posted to the point-of-sale system, after the dispensing of fuel and additive has completed.	"Your sale is being posted. Please make payment as arranged."
192	POST-SALE	This state is entered after the sale of	"Thank you for buying

TABLE 1

REF. NO.	STATE NAME	DESCRIPTION	EXAMPLE MESSAGE
		additive has been posted.	additive."
194	INFORMATION	The transition from STANDBY state 174 or PRESALE state 176 occurs if a customer requests information about additives.	"Here are the additives available, and this is what they do...."
196	ERROR	Several possible error conditions may arise. For example, dispensing unit 102 may be purposefully disabled. A customer's attempt to select an additive may be denied unless cash is paid in advance. The computer network controlling one or more dispensing units 102 (to be hereinafter described in greater detail with reference to Figure 7) may be inoperative, preventing the dispensing of additive. Meters and gauges within dispensing unit 102 may detect an error during the attempted dispensing of additive.	A message appropriate to the type of error occurring may be displayed. Alternatively, the message "System disabled" may be displayed.

Turning now to Figure 7, there is shown a simplified block diagram of an overall fueling station retail transaction system 200 incorporating one embodiment of the present invention. Based on the description which follows, those of ordinary skill in the art will recognize that system 200 in Figure 7 includes the principal components of current state-of-the-art retail fueling station systems, plus similar components to effect the incorporation of fuel additive dispensing capabilities in accordance with the principles of the present invention. System 200 includes one or more fuel dispensers 104 (for clarity, only one of which being shown in Figure 7) having fuel additive dispensing units 102 associated therewith (again, only one of which being shown in Figure 7). System 200 further comprises a central POS network server 210 to which each fuel dispenser 104 is connected via communication link 206. Further, POS network server 210 is coupled by communications link 209 to central additive network server 202 to which each fuel additive dispensing unit 102 is connected by a communications link 207. Communications link 209 enables the integration of fuel additive transactions with corresponding fuel transactions.

It is to be understood that communication links 206, 207, and 209 may take various forms. In some cases, communication links may be established by means of hard wiring, typical of conventional computer network configurations. Alternatively, communications links may be

1 established for the purposes of the present invention via wireless (e.g., radio frequency or
2 infrared) communication channels. In any event, for the purposes of the present disclosure, it
3 suffices to describe communications links 206 as channels by which information regarding the
4 operational status and transaction information of each fuel dispenser 104 can be transmitted to
5 central POS server 210, communications link 207 as the channel by which the operational
6 status and transaction information of each dispensing unit 102 can be communicated to central
7 additive network server 202, and communications link 209 as the channel by which operational
8 status or transaction information of a dispensing unit 102 can be communicated to central POS
9 server 210 by way of central additive network server 202.

10 Central POS server 210 is commonly part of an existing station point-of-sale ("POS")
11 system 208. Module 212 is the "cash register" at which consumers can consummate
12 transactions for the sale of fuel (and other items). Typically, POS system 208 is located within a
13 store or kiosk at the fueling station. In one embodiment, POS system 208 comprises a
14 computer 210 and user terminal 212. POS system 208 is also preferably coupled to each fuel
15 dispenser 104 via a communications link 206 and to central additive network server 202 via a
16 communications link 209 and by association to each fuel additive dispensing unit 102 via
17 communications link 209

18 In general, each dispensing unit 102 is designed such that it can either be connected to
19 POS system 208 through fuel dispenser 104, and/or it may be connected via network
20 communication link 207 to central additive network server 202 supporting the various
21 transaction authorization, control, processing, and data storage functions that are necessary for
22 dispensing unit operation and the integration of fuel additive transactions with the
23 corresponding fuel transactions such that payment of the additives can be made in the same
24 form and manner as that of the fuel or other purchases. Due to the preferability of avoiding the
25 extensive system hardware/software redevelopment that would be required to upgrade (e.g.,
26 retrofit) existing station point-of-sale systems to incorporate all required dispensing unit
27 functionality, the disclosed embodiment contemplates the separate network control server
28 alternative as depicted in Figure 6.

29 In one embodiment, each dispensing unit 102 at a site location attaches to a fuel
30 dispenser 104 and is connected to separate central additive network server 202 such that each
31 dispensing unit 102 sends and receives sales authorizations and transactional data primarily to
32 and from the central additive network server 202, and each fuel dispenser 104 sends and
33 receives sales authorizations and transactional data primarily to and from the existing point-of-

1 sale system 208. Both central additive network server 202 and the retail station POS system
2 208 are typically located inside a store or kiosk (not shown in Figure 7). In a typical
3 configuration, both the central network additive server 202 and retail station POS system 208
4 use network message communications protocols or other means to communicate via links 209
5 respectively with each dispensing unit 102 associated with a fuel dispenser 104.

6 In another embodiment, each dispensing unit 102 may be provided with a credit card
7 reader for enabling a customer to pay for fuel additive separately from the fuel itself. Those of
8 ordinary skill in the art will appreciate that such a credit card reader may be exposed on the
9 face of display and control module 110 to enable a user to select and pay for a desired fuel
10 additive. Control information regarding the selection of and payment for additive may be
11 communicated to central additive network server 202 and/or POS system 208 in the manner
12 described herein.

13 In a typical operating mode configuration (payment via cash after the fueling transaction
14 is completed), a customer lifts a nozzle 162 at the fuel dispenser 104, and fuel dispenser 104
15 requests authorization from POS system 208. Once authorization is received, fuel dispenser
16 104 begins dispensing fuel. At such point that the customer selects an additive at dispensing
17 unit 102, dispensing unit 102 monitors such selection, and requests authorization from central
18 additive network server 202. Once authorization is received, dispensing unit 102 dispenses
19 additive into the fuel refueling stream at the fuel dispenser 104 during the fuel refueling process
20 under one of three dispensing modes as previously described. After the fueling transaction is
21 completed, fuel dispenser 104 transmits fuel sale information to POS system 208, and
22 dispensing unit 102 transmits fuel additive sale information to central additive network server
23 202. By means of computer network integration, POS system 208 then receives the fuel
24 additive sale information from central additive network server 202 such that the fuel additive
25 sale information can be matched with and posted to the corresponding fuel sale information. In
26 this manner, the customer can pay for the cost of the fuel additive purchase at the same time
27 and place, and in the same form and manner, as that of the fuel or other purchases.

28 In another operating mode configuration (payment via cash prior to a fueling transaction
29 being initiated in which a preset amount of additive is requested by the customer), a customer
30 pays the cashier inside the store or kiosk and returns to fuel dispenser 104. Through computer
31 integration means, POS system 208 sends a preset additive volume message to central
32 additive network server 202 indicating the selected additive amount and the designated fuel
33 dispenser 104. Central additive network server 202 authorizes the corresponding dispensing

1 unit 102 and such dispensing unit 102 dispenses additive into the fuel refueling stream at the
2 fuel dispenser 104 during the fuel refueling process under one of three dispensing modes as
3 previously described. After the fueling transaction is completed, fuel dispenser 104 transmits
4 fuel sale information to POS system 208, and dispensing unit 102 transmits fuel additive sale
5 information to central additive network server 202. By means of computer network integration,
6 POS system 208 then receives the fuel additive sale information from the central additive
7 network server 202 for ensuing processing.

8 In yet another operating mode configuration (payment via cash prior to a fueling
9 transaction being initiated in which the customer is not required to specify his/her desire for an
10 additive at the time of prepayment), a customer pays the cashier inside the store or kiosk and
11 returns to the fuel dispenser 104. Through computer integration means, POS system 208 sends
12 a prepay fuel volume message to the central additive network server 202 indicating the total
13 prepaid amount and the designated fuel dispenser 104. POS system 208 also delays
14 authorization of the appropriate fuel dispenser 104 pending receipt of a prepay allocation
15 message from central additive network server 202. Central additive network server 202 informs
16 the appropriate dispensing unit 102 of such prepay condition, and such dispensing unit
17 monitors ensuing customer selections of fuel and fuel additive, and informs the central network
18 server of such selections. If no additive is selected, central additive network server 202 sends a
19 prepay allocation message to POS system 208 indicating that 100% of the prepaid amount
20 should be allocated to fuel. POS system 208 then authorizes the appropriate fuel dispenser 104
21 for such amount. If, however, an additive is selected, central additive network server 202 uses a
22 prepay allocation algorithm to calculate the respective amounts of fuel and additive that should
23 be dispensed, based on the total prepaid amount, the fuel grade and additive type selected and
24 their respective retail prices and fuel additive treat rate (i.e., the volume of additive dispensed
25 per volume of fuel dispensed). After such calculation, central additive network server 202 sends
26 a prepay allocation message to POS system 208 indicating the amount of the prepaid amount
27 to be allocated to fuel. POS system 208 then authorizes the appropriate fuel dispenser 104 for
28 such amount, and central network additive server 202 authorizes the appropriate dispensing
29 unit 102 for the prepaid amount to be allocated to the selected additive. Dispensing unit 104
30 then dispenses additive into the fuel refueling stream at the fuel dispenser 104 during the fuel
31 refueling process under one of three dispensing modes as previously described. After the
32 fueling transaction is completed, fuel dispenser 104 transmits fuel sale information to POS
33 system 208, and dispensing unit 102 transmits fuel additive sale information to central additive

1 network server 202. By means of computer network integration, POS system 208 then receives
2 the fuel additive sale information from central additive network server 202 for ensuing
3 processing.

4 In yet another operating configuration (a prepaid fuel-only transaction in which a
5 customer specifies to the cashier that no additive is desired), a customer may prepay to the
6 cashier. The station POS system 208 sends a message via communications link 209 informing
7 central additive network server 202 of a fuel-only prepay transaction. In this case, central
8 additive network server 202 "disables" the respective dispensing unit 102 for the duration of the
9 fuel transaction.

10 The description of such communications and operations for the various operating mode
11 configurations are but one of many similar processes that systems in accordance with the
12 present invention may employ, depending on the type of point-of-sale system and the overall
13 mode of operation (e.g. post-pay cash inside, post-pay via credit card at the fuel dispenser,
14 prepay cash or credit inside, etc.) to direct, control, and process transactions. Such
15 communications protocols for such communications can be via network messages or serial port
16 communications in a variety of forms and manners, as would be familiar and appreciated by
17 those of ordinary skill in the art. In total, systems in accordance with the present invention
18 support a wide variety of configurations, including the inclusion or integration of some or all
19 dispensing unit control and functional capabilities within the fuel dispenser and station POS
20 system 208 if desired. As with this and other aspects of the invention, it will be apparent to
21 those of ordinary skill in the art that many embodiments of the subject invention may be
22 designed that are not described in specific detail herein.

23 From the foregoing detailed description, it should be apparent to those of ordinary skill in
24 the art that a method and apparatus for dispensing fuel additives simultaneously with the
25 dispensation of fuel in a retail setting has been disclosed. Systems in accordance with the
26 disclosed embodiment of the invention are advantageously adapted to be incorporated into
27 existing retail fueling station systems, and are adapted to be operable before and during the
28 normal fuel dispensing process.

29 As described above, the invention in part involves the use of computer-based electronic
30 systems, of which many personal and industrial grades and types are available. The
31 programming necessary to implement the functionality described herein is believed to be within
32 the capability of any competent programmer, and may be accomplished through the use of a
33 program storage device readable by the processor that encodes a program of instructions

1 executable by the processor for performing the operations described above. The program
2 storage device may take the form of, e.g., a floppy disk; a CD-ROM; a memory device (e.g.,
3 RAM, ROM, EPROM, EEPROM, etc.); and other forms of the kind well-known in the art or
4 subsequently developed. The program of instructions may be "object code," i.e., in binary form
5 that is executable more-or-less directly by the computer; in "source code" that requires
6 compilation or interpretation before execution; or in some intermediate form such as partially
7 compiled code. The program storage device may be one that is directly readable by the
8 processor, or it may be one that is unusable by the processor per se but that provides
9 intermediate storage of the program of instructions. The program of instructions may be read
10 directly from the program storage device by the processor; alternatively, the program of
11 instructions may be temporarily or permanently stored in the program storage device and
12 transmitted from it to the processor over one or more links, e.g., over a telephone connection
13 (such as a modem connection or an ISDN line); over a cable-modem hookup; over the Internet;
14 via radio- or satellite transmission; etc., possibly with other program storage devices providing
15 intermediate storage along the way. The precise forms of the program storage device and of
16 the encoding of instructions are immaterial here.

17 Although specific embodiments of the invention have been described herein in some
18 degree of detail, this has been done merely to illustrate various features and aspects of the
19 present invention, and is not to be construed as limiting the scope of the invention as defined by
20 the claims which follow. Those of ordinary skill in the art will appreciate that various
21 substitutions, alterations, and/or modifications, including but not limited to those design
22 variations and options that have been specifically noted herein, may be made to any of the
23 embodiments of the invention disclosed herein without departing from the spirit and scope of
24 the claims which follow.

1 **WHAT IS CLAIMED IS:**

2 1. A fuel additive dispensing system, comprising:
3 a housing, adapted to be affixed to a fuel dispenser having a fuel dispensing hose;
4 a hydraulic module, disposed at least partially within said housing, having a fluid input
5 adapted to be coupled to at least one source of fuel additive and a fluid output
6 flow adapted to be coupled to said fuel dispensing hose to introduce said
7 additive into a stream of fuel delivered through said fuel dispensing hose;
8 control circuitry, coupled to said hydraulic module, for generating electrical control
9 signals applied to said hydraulic module to cause a controlled amount of said
10 additive to be released from said at least one source to flow through said fluid
11 input and fluid output and into said fuel dispensing hose.

12 2. A fuel additive dispensing system in accordance with claim 1, wherein said controlled
13 amount of said additive is determined based upon measurements of past performance of said
14 hydraulic module.

15 3. A fuel additive dispensing system in accordance with claim 1, wherein said fluid input
16 comprises an input flow control manifold and said fluid output comprises an output flow control
17 manifold.

18 4. A fuel additive dispensing system in accordance with claim 1, wherein said hydraulic
19 module further comprises a flow meter coupled to said control circuitry for monitoring the flow of
20 additive through said hydraulic module.

21 5. A fuel additive dispensing system in accordance with claim 4, wherein said hydraulic
22 module operates to dispense said additive with an accuracy of at least approximately 0.75%.

23 6. A fuel additive dispensing system in accordance with claim 1, wherein said controlled
24 amount of additive is released in at least one increment into said stream of fuel.

25 7. A fuel additive dispensing system in accordance with claim 1, wherein said controlled
26 amount of additive is released each time a predetermined amount of fuel is delivered through
27 said fuel dispensing hose.

28 8. A fuel additive dispensing system in accordance with claim 1, further comprising a

1 graphic display viewable by a user of said fuel dispenser.

2 9. A fuel additive dispensing system in accordance with claim 8, further comprising at least
3 one user-actuable control for activating said dispensing system to dispense said fuel additive
4 into said stream of fuel.

5 10. A fuel additive dispensing system in accordance with claim 1, wherein said at least one
6 source of fuel additive is external to said housing.

7 11. A fuel additive dispensing system in accordance with claim 1, wherein said controlled
8 amount of said additive is an amount proportional to a total amount of fuel in said stream of
9 fuel.

10 12. A fuel additive dispensing system in accordance with claim 1, wherein said controlled
11 amount of said additive is an amount specified by a user of said fuel dispenser.

12 13. A fuel additive dispensing system in accordance with claim 8, further comprising a
13 proximity detector, coupled to said control circuitry, for detecting the presence of a person in the
14 vicinity of said system.

15 14. A fuel additive dispensing system in accordance with claim 13, wherein said proximity
16 detector applies a detection signal to said control circuitry upon detection of a person in the
17 vicinity of said system.

18 15. A fuel additive dispensing system in accordance with claim 14, wherein said control
19 circuitry is responsive to said detection signal to display at least one predetermined image on
20 said graphic display.

21 16. A fuel additive dispensing system in accordance with claim 8, wherein said graphic
22 display is responsive to said control circuitry to display a plurality of separate images thereon.

23 17. A fuel additive dispensing system in accordance with claim 1, further comprising a user
24 interface coupled to said control circuitry, wherein said control circuitry is responsive to a
25 selection signal generated by said control circuitry to initiate dispensation of said fuel additive.

26 18. A fuel additive dispensing system in accordance with claim 17, wherein said user
27 interface is responsive to user interaction to generate said selection signal.

1 19. A fuel additive dispensing system in accordance with claim 18, wherein said user
2 interface is responsive to said user interaction occurring prior to said stream of fuel being
3 delivered through said fuel dispensing hose to generate said selection signal.

4 20. A fuel additive dispensing system in accordance with claim 18, wherein said user
5 interface is responsive to said user interaction occurring while said stream of fuel is being
6 delivered through said fuel dispensing hose to generate said selection signal.

7 21. A method of dispensing a fuel additive, comprising:

- 8 (a) coupling a fluid input of a hydraulic module to a source of said additive;
9 (b) coupling a fluid output of said hydraulic module to a fuel dispensing hose;
10 (c) electrical signals to said hydraulic module to cause a controlled amount of said
11 additive to flow from said source, through said hydraulic module, and into said
12 stream of fuel flowing through said fuel dispensing hose.

13 22. A method in accordance with claim 21, further comprising the step of:

- 14 (d) obtaining measurements of performance of said hydraulic module;
15 wherein said controlled amount of said additive is determined based upon said
16 measurements of past performance of said hydraulic module.

17 23. A method in accordance with claim 21, wherein said fluid input comprises an input flow
18 control manifold and said fluid output comprises an output flow control manifold.

19 24. A method in accordance with claim 21, wherein said hydraulic module further comprises
20 a flow meter coupled to said control circuitry for monitoring the flow of additive through said
21 hydraulic module.

22 25. A method in accordance with claim 24, wherein said hydraulic module operates to
23 dispense said additive with an accuracy of at least approximately 0.75%.

24 26. A method in accordance with claim 21, wherein said controlled amount of additive is
25 released in successive increments into said stream of fuel.

26 27. A method in accordance with claim 21, wherein said controlled amount of additive is
27 released each time a predetermined amount of fuel is delivered through said fuel dispensing

1 hose.

2 28. A method in accordance with claim 21, further comprising providing a graphic display
3 viewable by a user of said fuel dispenser.

4 29. A method in accordance with claim 28, further comprising providing at least one user-
5 actuable control for activating said dispensing system to dispense said fuel additive into said
6 stream of fuel.

7 30. A method in accordance with claim 21, wherein said at least one source of fuel additive
8 is external to said housing.

9 31. A method in accordance with claim 21, wherein said controlled amount of said additive
10 is an amount proportional to a total amount of fuel in said stream of fuel.

11 32. A method in accordance with claim 21, wherein said controlled amount of said additive
12 is an amount specified by a user of said fuel dispenser.

13 33. A method in accordance with claim 28, further comprising a proximity detector, coupled
14 to said control circuitry, for detecting the presence of a person in the vicinity of said system.

15 34. A method in accordance with claim 33, wherein said proximity detector applies a
16 detection signal to said control circuitry upon detection of a person in the vicinity of said system.

17 35. A method in accordance with claim 34, wherein said control circuitry is responsive to
18 said detection signal to display at least one predetermined image on said graphic display.

19 36. A method in accordance with claim 28, wherein said graphic display is responsive to
20 said control circuitry to display a plurality of separate images thereon.

21 37. A method in accordance with claim 21, further comprising a user interface coupled to
22 said control circuitry, wherein said control circuitry is responsive to a selection signal generated
23 by said control circuitry to initiate dispensation of said fuel additive.

24 38. A method in accordance with claim 37, wherein said user interface is responsive to user
25 interaction to generate said selection signal.

1 39. A method in accordance with claim 38, wherein said user interface is responsive to said
2 user interaction occurring prior to said stream of fuel being delivered through said fuel
3 dispensing hose to generate said selection signal.

4 40. A method in accordance with claim 38, wherein said user interface is responsive to said
5 user interaction occurring while said stream of fuel is being delivered through said fuel
6 dispensing hose to generate said selection signal.

7 41. A fuel additive dispensing system in accordance with any of claims 1 through 20,
8 wherein said control circuitry is adapted to be coupled to a retail point-of-sale system including
9 a point-of-sale server for controlling a fuel dispensing transaction.

10 42. A fuel additive dispensing system in accordance with claim 41, wherein fuel and said
11 fuel additive are dispensed in a single integrated transaction.

12 43. A fuel additive dispensing system in accordance with claim 42, wherein a predetermined
13 amount of said additive is dispensed.

14 44. A fuel additive dispensing system in accordance with claim 42, wherein the amount of
15 additive dispensed is proportional to the amount of said fuel dispensed.

16 45. A fuel additive dispensing system in accordance with claim 41, wherein said control
17 circuitry is responsive to at least one signal from said retail point-of-sale system to disable said
18 fuel additive dispensing system.

19 46. A method in accordance with any of claims 21 through 40, wherein said control circuitry
20 is adapted to be coupled to a retail point-of-sale system including a point-of-sale server for
21 controlling a fuel dispensing transaction.

22 47. A method in accordance with claim 46, further comprising dispensing said fuel and said
23 fuel additive in a single integrated transaction.

24 48. A method in accordance with claim 42, further comprising dispensing a predetermined
25 amount of said additive.

26 49. A method in accordance with claim 46, further comprising dispensing an amount of
27 additive dispensed proportional to the amount of said fuel dispensed.

1 50. A fuel additive dispensing system in accordance with claim 46, wherein said control
2 circuitry is responsive to at least one signal from said retail point-of-sale system to disable said
3 fuel additive dispensing system.

ABSTRACT

A fuel additive dispensing system for a vehicle refueling station that enables customers at fuel dispensers to select and add supplemental fuel additives to their fuel while they fill up. The system includes an additive dispensing unit adapted to be attached to a fuel dispenser. Upon a selection by the customer, the additive dispensing unit automatically injects a precise volume of the selected product into the refueling stream while the customer refuels. Following a transaction, the system enables the customer to pay for the cost of additives in the same form and manner as that of their fuel or other purchase items.

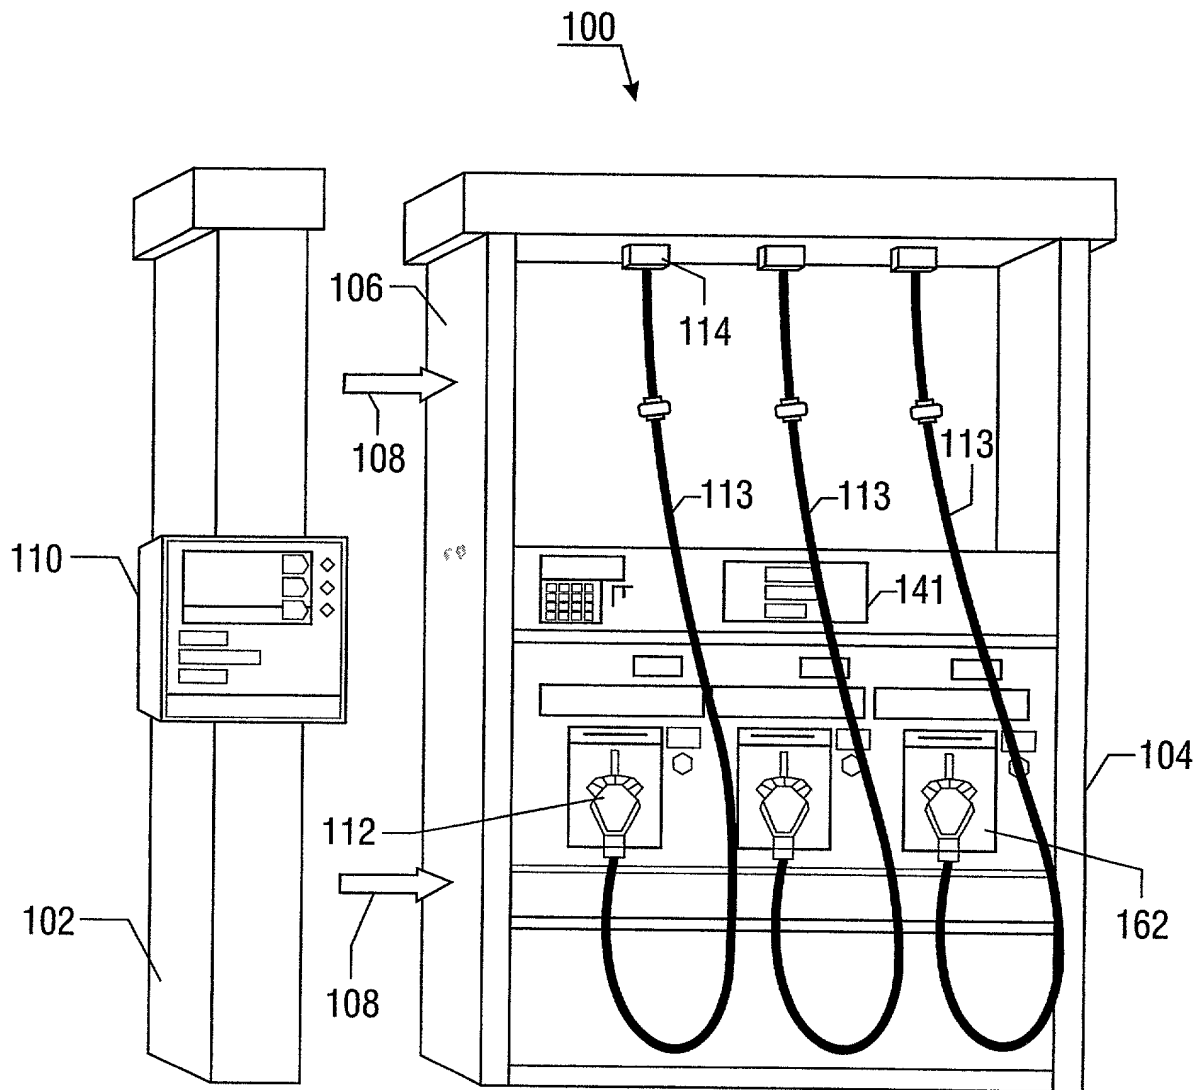


FIG. 1

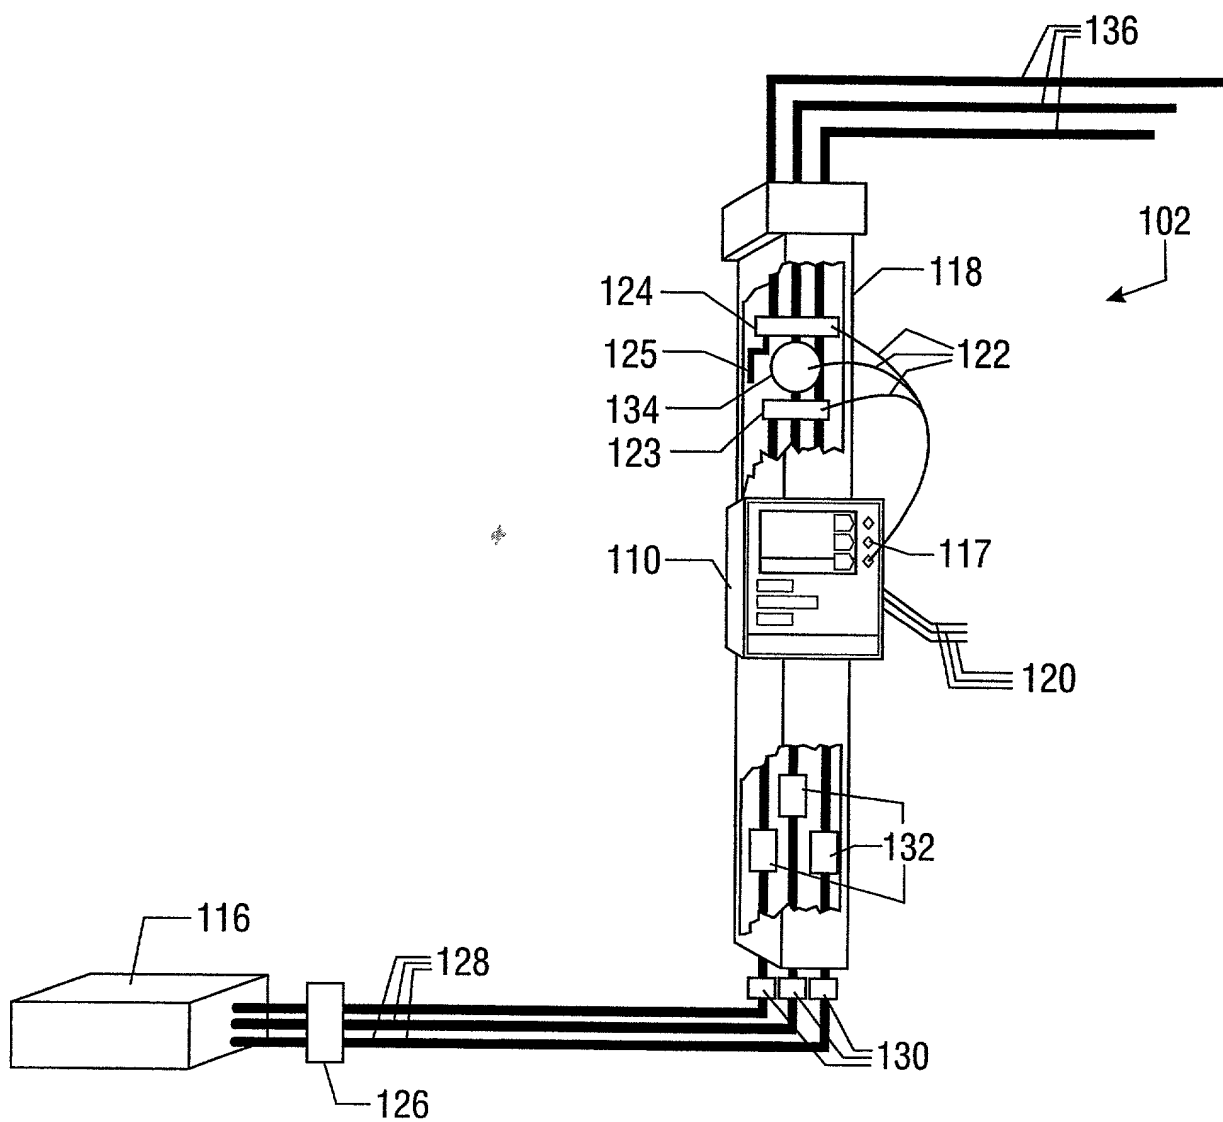


FIG. 2

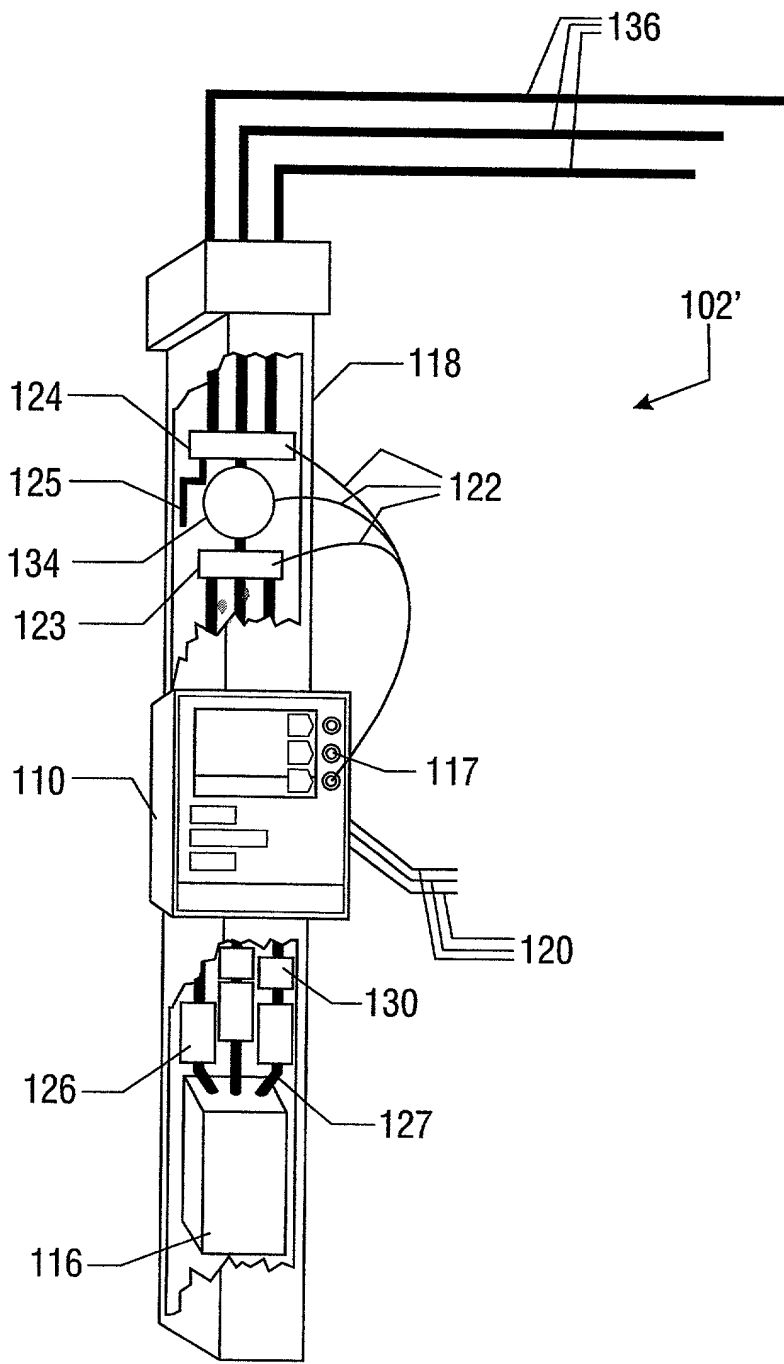


FIG. 3

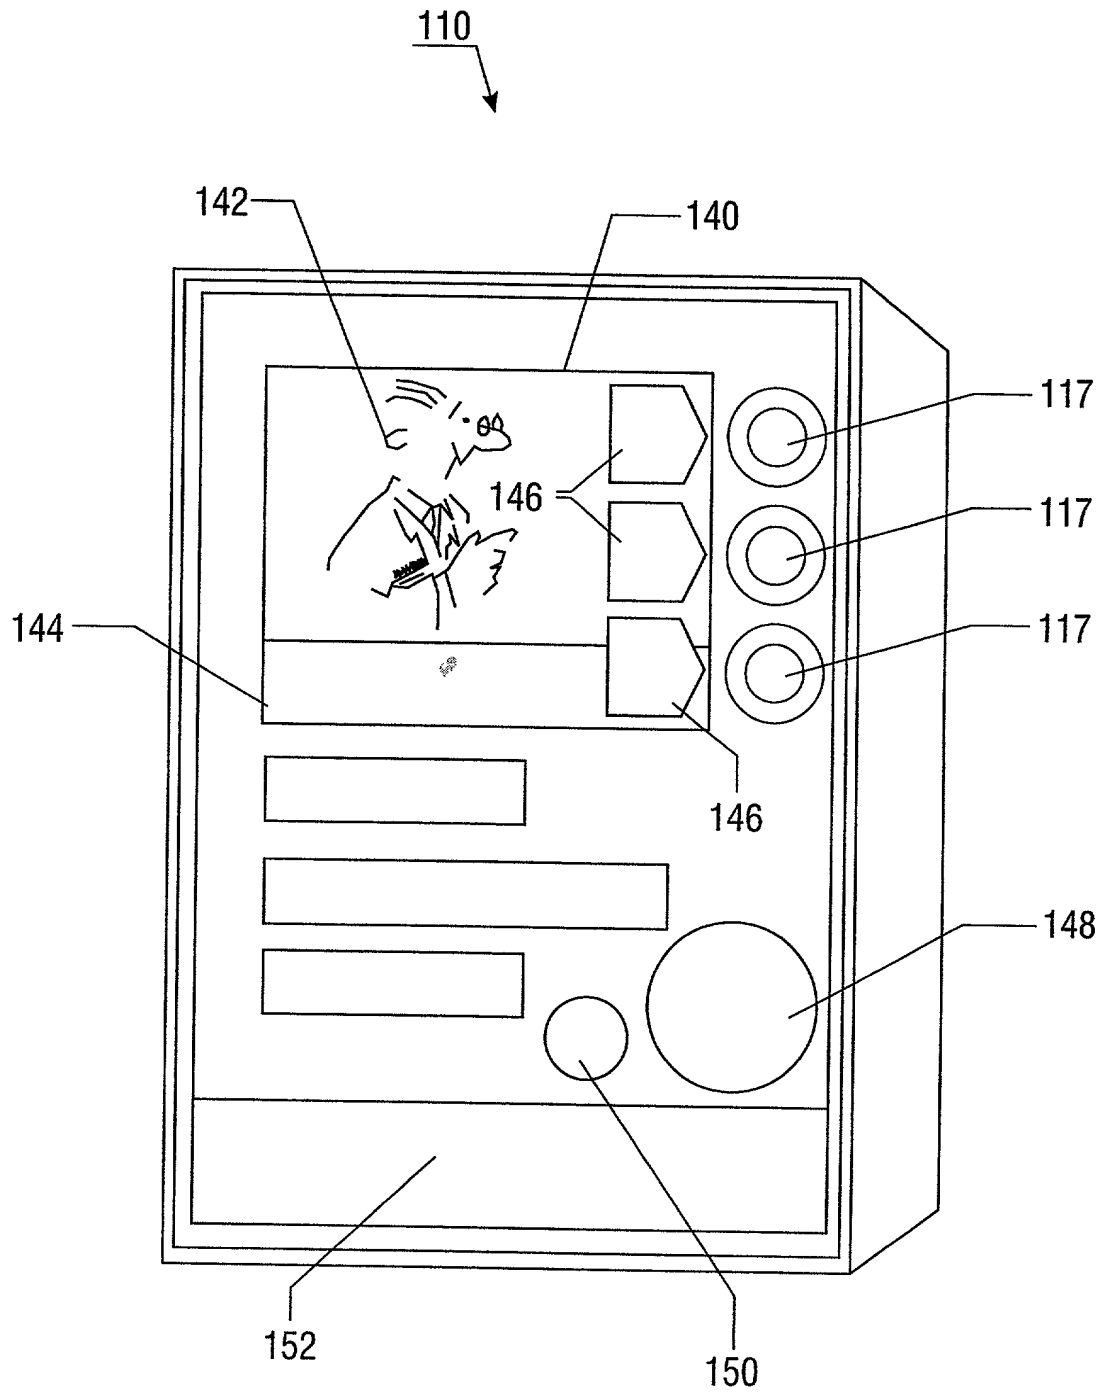


FIG. 4

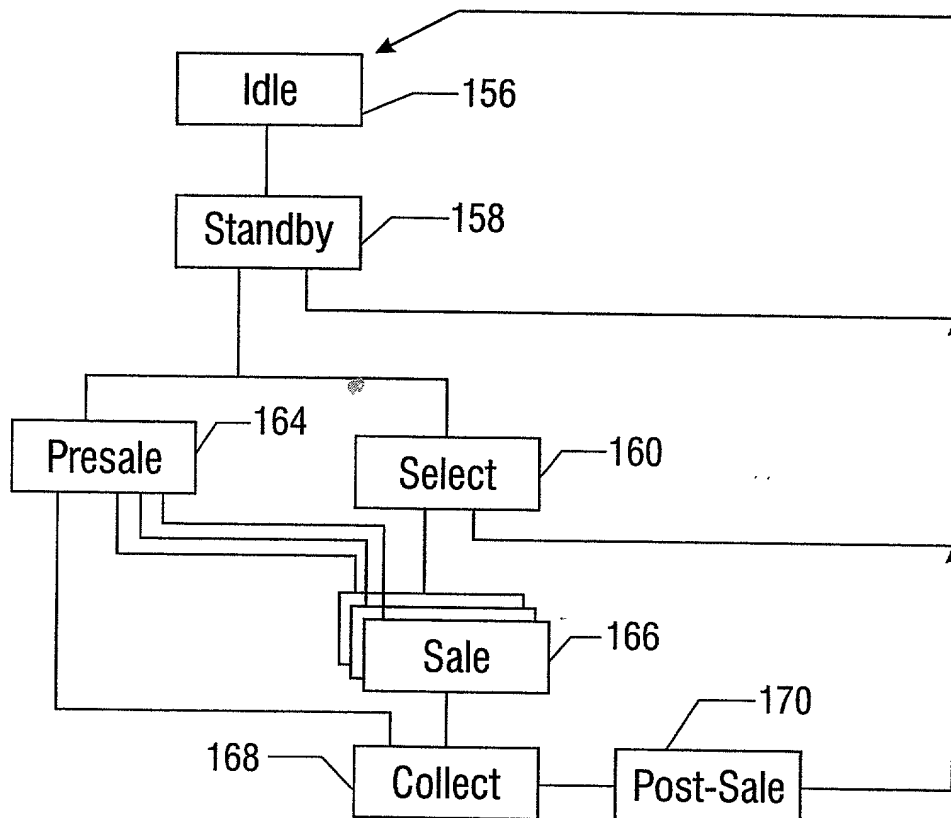


FIG. 5

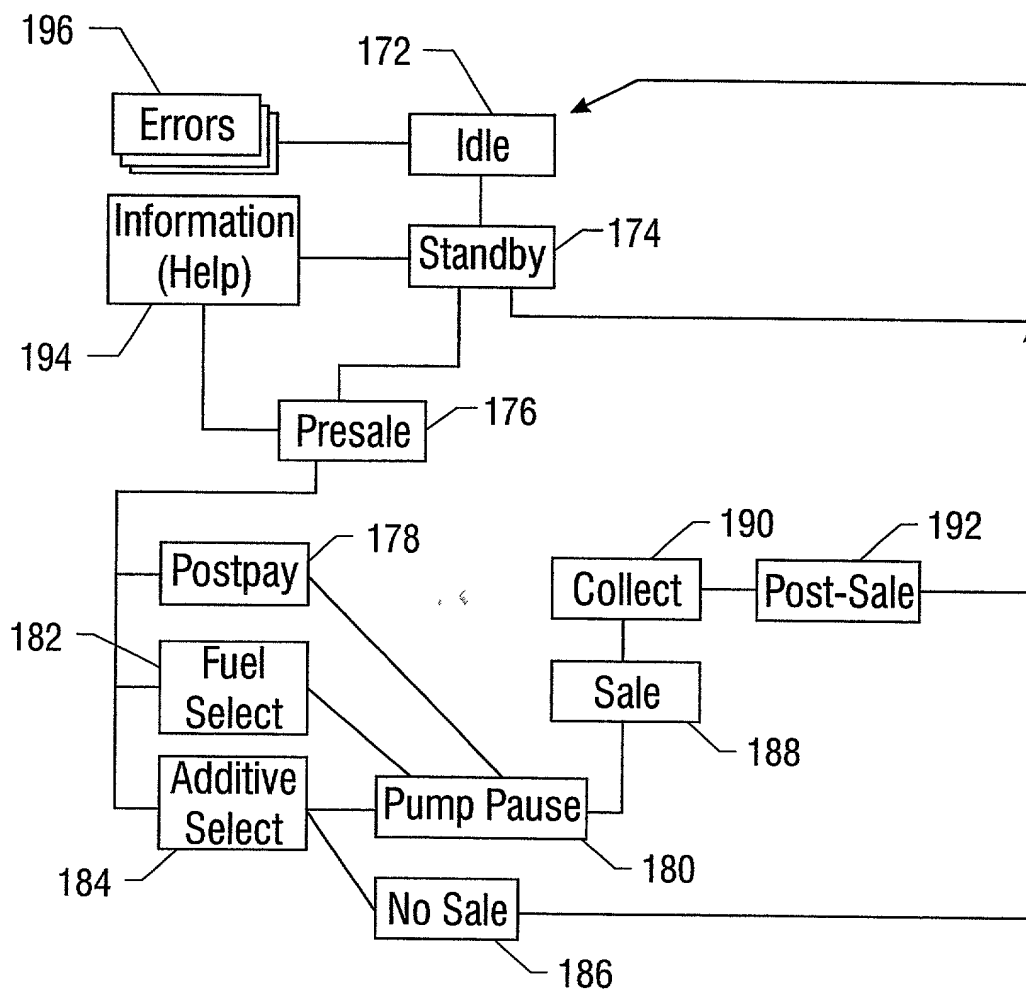


FIG. 6

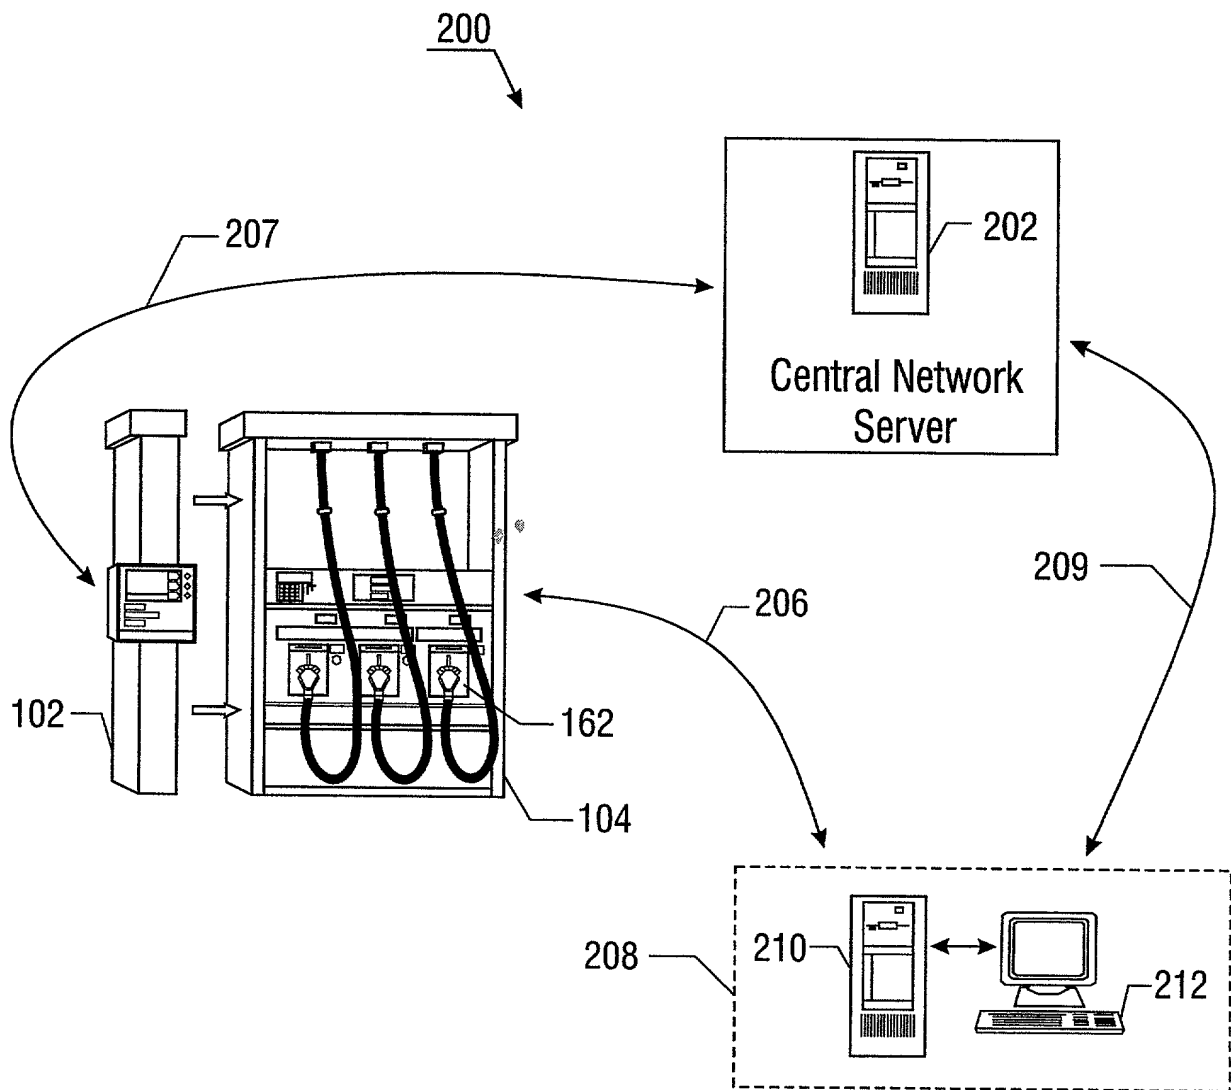


FIG. 7

DECLARATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or the below named inventors are the original, first and joint inventors (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD AND APPARATUS FOR FUEL ADDITIVE DISPENSING**, the Specification of which:

☒ is attached hereto.
☐ was filed on _____ as Application Serial No. _____


I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability of the subject matter claimed in this application, as "materiality" is defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby direct that all correspondence and telephone calls be addressed to Hugh R. Kress, Arnold, White & Durkoc, P.O. Box 4433, Houston, Texas 77210, (713) 787-1405.

I hereby declare that all statements made of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Full Name:	Robert	Bennett	Stout, Jr.
	(First)	(initial)	(Last)

Inventor's Signature: 

Date: 10-559-2000

Country of Citizenship: U.S.A.

Residence Address: 11910 6th Street
(include number, street name,
city, state, and country) Houston, Texas 77072

Post Office Address: _____
(if different from residence address)

PATENT APPLICATION OF STOUT ET AL.
INVENTORS' DECLARATION

Inventor's Full Name: Jonathan Robert Guthrie
(First) (Initial) (Last)

Inventor's Signature: Jonathan R. Guthrie

Date: 10 February, 2000

Country of Citizenship: U.S.A.

Residence Address: 4119 Windrift
(include number, street name,
city, state, and country) Houston, Texas 77066

Post Office Address:
(if different from residence
address)

Inventor's Full Name: Chris David Duhon
(First) (Initial) (Last)

Inventor's Signature: Chris Duhon

Date: February 8, 2000


Country of Citizenship: U.S.A.

Residence Address: 3755 Tanglely
(include number, street name,
city, state, and country) Houston, Texas 77005

Post Office Address:
(if different from residence
address)

[illegible]

Examiner: Unassigned

CERTIFICATE OF EXPRESS MAIL
NUMBER EL521291863US
DATE OF DEPOSIT 02/11/00
I hereby certify that this paper or fee is being deposited
with the United States Postal Service "EXPRESS MAIL
POST OFFICE TO ADDRESSEE" service under 37
C.F.R. 1.10 on the date indicated above and is addressed
to: Assistant Commissioner for Patents, Washington,
D.C. 20231

Signature

Sir:

The undersigned, being Assignee of record of the entire interest in the above-identified application by virtue of an assignment recorded or to be recorded in the United States Patent and Trademark Office as set forth below, hereby elects, under 37 C.F.R. § 3.71, to prosecute the application to the exclusion of the inventor.

The Assignee hereby revokes any previous Powers of Attorney and appoints:

William D. Durkee, Reg. No. 20,337; Hugh R. Kress, Reg. No. 36,574; Peter J. Chassman, Reg. No. 38,841; Mark L. Gleason, Reg. No. 39,998; Richard C. Auchterlonie, Reg. No. 30607; T. Gordon White, Reg. No. 28,796; Robert J. McAughan, Reg. No. 36,599; and J. Paul Williamson, Reg. No. 29,600;

each an attorney or agent of the firm of ARNOLD, WHITE & DURKEE, as its attorney or agent for so long as they remain with such firm, with full power of substitution and revocation, to prosecute the application, to make alterations and amendments therein, to transact all business in the Patent and Trademark Office in connection therewith, and to receive any Letters Patent, and for one year after issuance of such Letters Patent to file any request for a certificate of correction that may be deemed appropriate.

Pursuant to 37 C.F.R. § 3.73, the undersigned has reviewed the evidentiary documents, specifically the Assignment to Baldor Electric Company, referenced below, and certifies that to the best of my knowledge and belief, title remains in the name of the Assignee.

Please direct all communications as follows:

Hugh R. Kress
ARNOLD, WHITE & DURKEE
P.O. Box 4433
Houston, Texas 77210-4433
(713) 787-1405 (voice)
(713) 787-1440 (fax)

ASSIGNEE:

ADDITECH, INC.

By: Mark Haglund
Name: Mark Haglund
Title: PRESIDENT & CEO

Date: 12/7/99

ASSIGNMENT:

☒ Concurrently filed
☐ Previously recorded
Date:
Reel: -
Frames: -